




Catalogue

Double Girder Overhead Crane

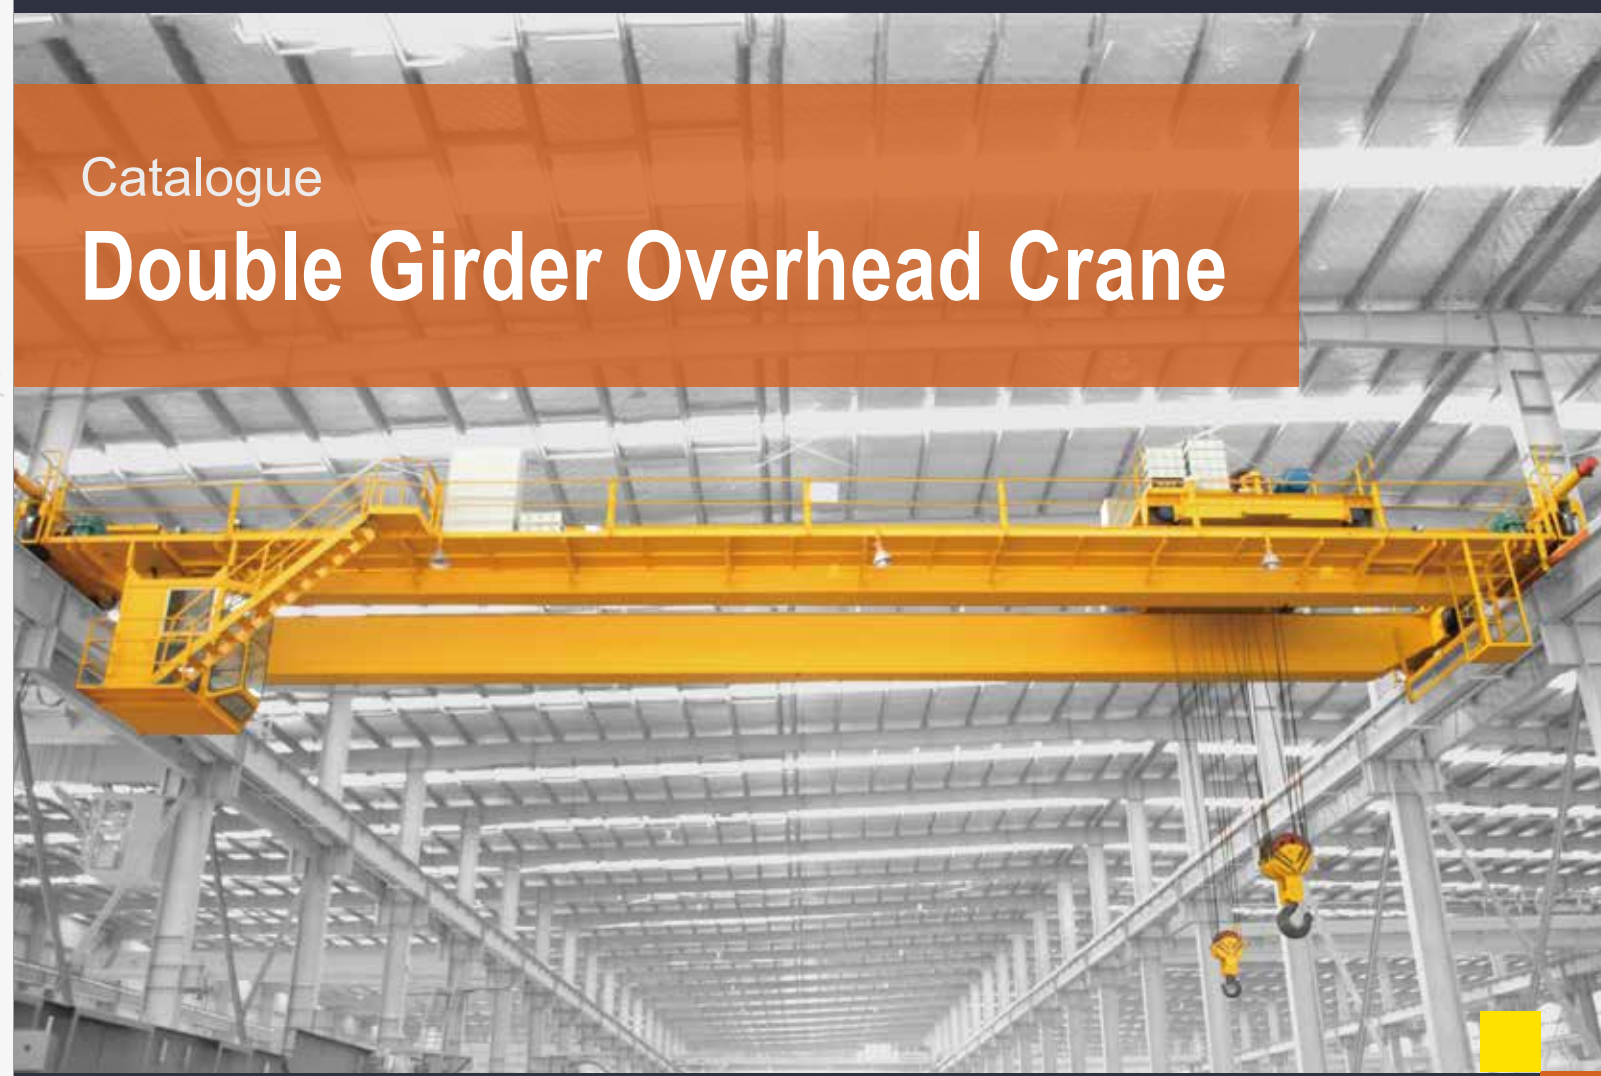

UP TO NOW, WE EXPORT MORE THAN **50** COUNTRIES

HEHAN ZOKE CRANE CO., LTD

EMAIL: sales@zokecrane.com

TEL: +86 373-3872-232

FAX: +86 373-5259-699

WEB: www.zoke-crane.com

www.zokecrane.com

ADDRESS: Changnao Industrial District, Xinxiang, Henan China

HEHAN ZOKE CRANE CO., LTD

www.zokecrane.com

ABOUT ZOKECRANE

Quality Is Our Top Priority

ZOKE CRANE is ISO9001-2008 registered. This means we actively monitor every part of our business, conducting monthly evaluations that cover everything from customer service to delivery times.

Technical Innovation Is Our Development Concept

ZOKE CRANE has been constantly carrying out technological innovation for many years, communicating and cooperating with internationally renowned enterprises, actively introducing high-tech, and pushing the ZOKE brand to the international market. Develop new products to meet the market demand for high-end products, market-oriented, based on integrity, take the road of technological innovation.

Service Is The Basis Of Our Survival


It is our aim to improve the production efficiency of customers. Customized and OEM accepted We provide professional consultant, sales, design, production, installation and commissioning, maintenance for customers worldwide.

CONTENT

LH型电动葫芦桥式起重机.....	01
LH Model Double Girder Overhead Crane	
简要介绍 A Brief Introduction	01
技术参数 Parameters Table	02
QD型吊钩桥式起重机.....	07
QD Model Double Girder Overhead Crane	
简要介绍 A Brief Introduction	07
技术参数 Parameters Table	08
LHB型防爆双梁桥式起重机.....	20
LHB Model Explosion Proof Double Girder Overhead Crane	
简要介绍 A Brief Introduction	20
技术参数 Parameters Table	21
QB型防爆双梁桥式起重机.....	27
QB Model Explosion Proof Double Girder Overhead Crane	
简要介绍 A Brief Introduction	27
技术参数 Parameters Table	28
QZ型抓斗桥式起重机.....	32
QZ Model Double Girder Overhead Crane With Grab	
简要介绍 A Brief Introduction	32
技术参数 Parameters Table	33
QC型电磁桥式起重机	35
QC Model Double Girder Overhead Crane With Electro Magnet	
简要介绍 A Brief Introduction	35
技术参数 Parameters Table	36
QCL型电磁挂梁桥式起重机.....	39
QCL Model Overhead Crane With Electromagnetic Spreader Beam	
简要介绍 A Brief Introduction	39
技术参数 Parameters Table	40
QL型电动旋转电磁桥式起重机.....	49
QL Model Overhead Crane With Electric Rotation Function	
简要介绍 A Brief Introduction	49
技术参数 Parameters Table	50
QDY/YZ 型铸造冶金桥式起重机.....	57
QDY/YZ Model Overhead Crane For Casting, Foundry And Metallurgy	
简要介绍 A Brief Introduction	57
技术参数 Parameters Table	58

LH型电动葫芦桥式起重机

LH Model Double Girder Overhead Crane

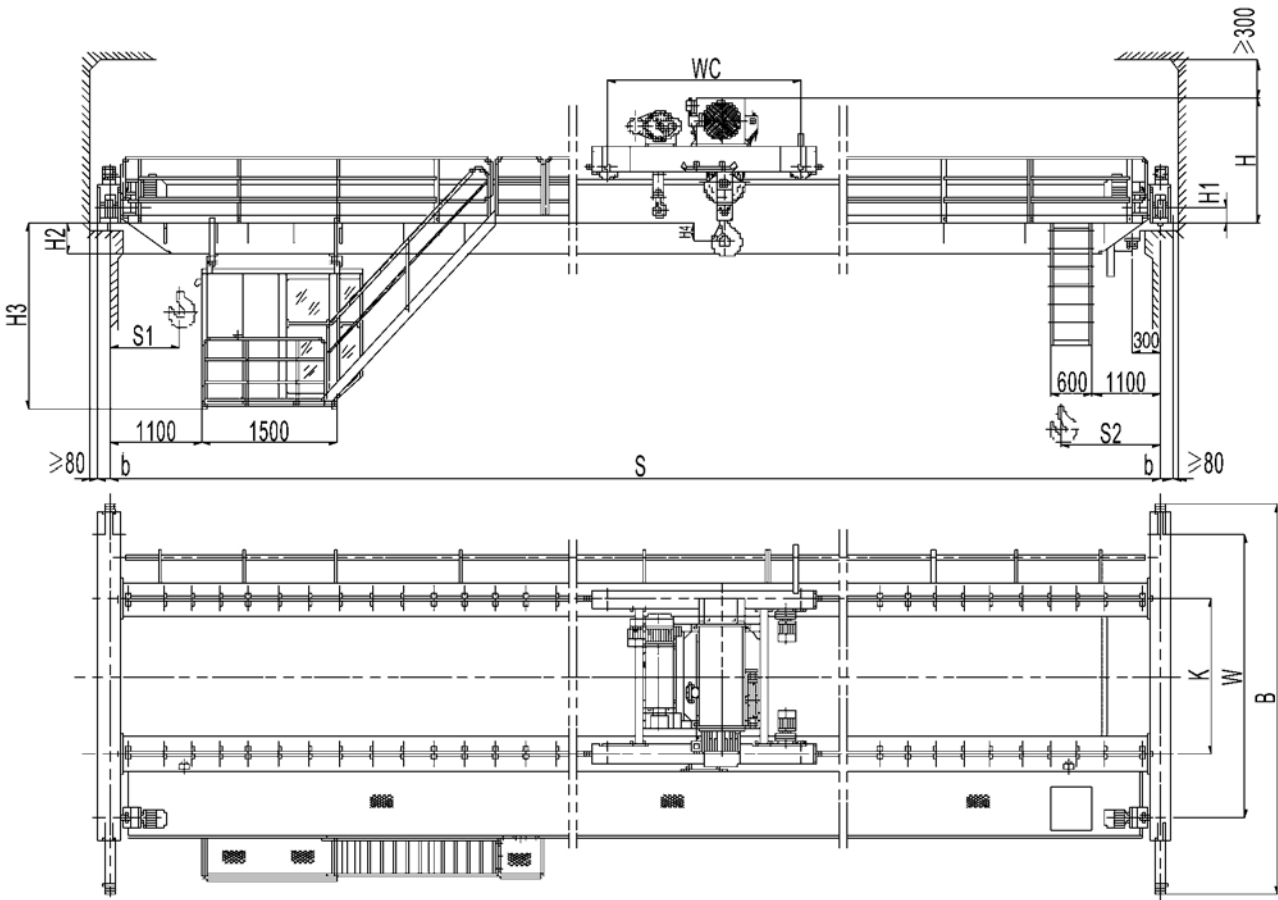

简介 A Brief Introduction

LH型电动葫芦桥式起重机具有外形尺寸紧凑，建筑净空高度低，自重轻，轮压小等优点。适用于机械加工车间，冶金厂辅助车间，仓库，料场，电站等的转运，装配，检修和装卸作业；它也可以代替普通双梁桥式起重机，用于轻纺工业和食品工业的生产车间。其工作类型为轻级和中级，工作环境温度为-25℃~40℃，禁止在易燃易爆，腐蚀性介质环境中使用。

LH model double girder overhead crane has features such as: compact design, load headroom, light dead weight and small wheel load. They are applicable to the transfer, assembly, check and repair as well as load and unload at mechanic processing workshop, subsidiary workshop of metallurgical mills, warehouse, goods yard and power station. They can also be used at production workshop in light textiles or food industry. The working ambient temperature is -25℃~40℃. It is forbidden to work in environment with combustible, explosive or corrosive media.

本产品设有地面和操作室操作两种形式。操作室有开式和闭式两种。可根据实际情况分为左和右面安装两种形式。入门方向有侧面，端面，顶部三种。以满足用户在各种不同需要的情况下进行选择。

There are two control ways: pendent and cabinet. The cabin is divided into open type and closed type. The cabinet can be installed on the left or right according to actual conditions. The operator can enter the cabinet from one side, rear or top, which depends on the different user's requirements.

技术参数 Technical Data

额定起重量 (t)	QSWL Gn Rated Lifting Capacity	32/10
操纵形式	Operational Method	地面操纵 Ground Controlling 操纵室 Room Controlling
速度 Speed (m/min)		
主钩起升	Main. Hook Lifting	3 (0.3/3)
副钩起升	Aux. Hook Lifting	7 (7/0.7)
小车运行	Crab Travelling	20
大车运行-地面	Trolley Travelling - Ground	20
大车运行-操纵室	Trolley Travelling - Room	45

电动机 Motor (型号/kw)		
主钩起升	Main. Hook Lifting	ZDX 62-6/18.5 (ZDS2.2/18.5)
副钩起升	Aux. Hook Lifting	ZD1 51-4/13 (ZDS1-1.5/13)
小车运行	Crab Travelling	YDE 100L1-4/2.2*2
大车运行-地面	Trolley Travelling-ground	YDE 100L2-4/3*2
大车运行-操纵室	Trolley Travelling-room	YZRE 132M1-4/4*2 ZDR 125-4/4.6*2

电动葫芦	Electric Hoist	WH164; CD1(MD1)
起升高度 (m)	Lifting Height	9、12、16、24
工作制度	Working Track Recommended	A3-A5
电源	Power Source	3-phase A.C.三相交流; 50HZ; 380V
荐用大车道轨	Trolley Track Recommended	43KG/M

跨度 (m)	Span	7.5	10.5	13.5	16.5	19.5	22.5	25.5
起重机最大轮压 (KN)	Max. Wheel Presure	167	184	196	206	215	224	233
自重-地面操纵 (KG)	Crane Weight - Ground Controlling	12530	14660	16360	18870	21650	24260	27060
自重-操纵室 (KG)	Crane Weight - Room Controlling	13430	15560	17260	19770	22550	25160	27960

基本尺寸 Basic Dimensions (mm)	B	5070-5960			5572-6222			
	W	3600-4500						
	We	2200-2900						
	K	1600-2500						
	H	1900						
	H1	765						
	H2	170	270	370	470	570	670	770
	H3	2395	2495	2595	2695	2795	2895	2995
	H4	-700						
	b	230						
	S1	1100						
	S2	1600						

额定起重量 (t)	QSWL Gn Rated Lifting Capacity		20/5	
操纵形式	Opertional Method	地面操纵	Ground Controlling	操纵室 Room Controlling
速度 Speed (m/min)				
主钩起升	Main. Hook Lifting	4.2		
副钩起升	Aux. Hook Lifting	8 (8/0.8)		
小车运行	Crab Travelling	20		
大车运行–地面	Trolley Travelling - Ground	20		
大车运行–操纵室	Trolley Travelling - Room	45		

电动机 Motor (型号/kw)				
主钩起升	Main. Hook Lifting	ZD1 52-4/18.5		
副钩起升	Aux. Hook Lifting	ZD1 41-4/7.5 (ZDS1-0.8/7.5)		
小车运行	Crab Travelling	YDE 90L-4(D)/1.5*2		
大车运行–地面	Trolley Travelling-ground	YDE 90L-4(D)/1.5*2	YDE 100L1-4/2.2*2	
大车运行–操纵室	Trolley Travelling-room	ZDR 112L2-4/3*2	YZRE 132M1-4/4*2	

电动葫芦	Electric Hoist	WH164; CD1(MD1)						
起升高度 (m)	Lifting Height	9、12、18、24						
工作制度	Working Track Recommended	A3-A5						
电源	Power Source	3-phase A.C.三相交流； 50HZ； 380V						
荐用大车道轨	Trolley Track Recommended	43KG/M						
跨度 (m)	Span	7.5	10.5	13.5	16.5	19.5	22.5	25.5
起重机最大轮压 (KN)	Max. Wheel Presure	118	129	135	148	156	164	169
自重–地面操纵 (KG)	Crane Weight - Ground Controlling	10500	11500	13640	15980	17700	20300	22920
自重–操纵室 (KG)	Crane Weight - Room Controlling	11200	12200	14340	16680	18400	21000	23620

基本尺寸 Basic Dimensions (mm)	B	4632-5982						
	W	3750-4500						
	We	2310-2750						
	K	1600-2500						
	H	1790						
	H1	765					850	
	H2	170	170	270	370	520	520	620
	H3	2395	2395	2495	2595	2745	2745	2845
	H4	-350						
	b	230						
	S1	1100						
	S2	1100						

额定起重量 (t)	QSWL Gn Rated Lifting Capacity		16/3	
操纵形式	Opertional Method	地面操纵	Ground Controlling	操纵室 Room Controlling
速度 Speed (m/min)				
主钩起升	Main. Hook Lifting	3.5 (3.5/0.35)		
副钩起升	Aux. Hook Lifting	8 (8/0.8)		
小车运行	Crab Travelling	20		
大车运行–地面	Trolley Travelling - Ground	20		
大车运行–操纵室	Trolley Travelling - Room	45		

电动机 Motor (型号/kw)				
主钩起升	Main. Hook Lifting	ZD1 51-4/13 (ZDS1-1.5/13)		
副钩起升	Aux. Hook Lifting	ZD1 32-4/4.5 (ZDS1-0.4/4.5)		
小车运行	Crab Travelling	YDE 90L-4(D)/1.5*2		
大车运行–地面	Trolley Travelling-ground	YDE 90L-4(D)/1.5*2	YDE 100L1-4/2.2*2	
大车运行–操纵室	Trolley Travelling-room	ZDR 112L1-4/2.1*2	ZDR 112L2-4/3*2	

电动葫芦	Electric Hoist	CD1(MD1)						
起升高度 (m)	Lifting Height	9、12、18、24						
工作制度	Working Track Recommended	A3-A5						
电源	Power Source	3-phase A.C.三相交流； 50HZ； 380V						
荐用大车道轨	Trolley Track Recommended	38KG/M						
跨度 (m)	Span	7.5	10.5	13.5	16.5	19.5	22.5	25.5
起重机最大轮压 (KN)	Max. Wheel Presure	95	102	110	119	127	134	141
自重–地面操纵 (KG)	Crane Weight - Ground Controlling	7970	8610	9990	12800	15300	17540	20080
自重–操纵室 (KG)	Crane Weight - Room Controlling	8670	9310	10690	13500	16000	18240	20780

基本尺寸 Basic Dimensions (mm)	B	3500-5696						
	W	3000-4200						
	We	2000-2400						
	K	1600-2250						
	H	1450			1650			
	H1	75			765			
	H2	265	365	465	370	470	570	670
	H3	2490	2590	2690	2595	2695	2795	2895
	H4	-500			-310			
	b	120			230			
	S1	1240			900			
	S2	1450			1200			

额定起重量 (t)	QSWL Gn Rated Lifting Capacity		10/3	
操纵形式	Opertional Method	地面操纵	Ground Controlling	操纵室 Room Controlling
速度 Speed (m/min)				
主钩起升	Main. Hook Lifting	7 (7/0.7)		
副钩起升	Aux. Hook Lifting	8 (8/0.8)		
小车运行	Crab Travelling	20		
大车运行–地面	Trolley Travelling - Ground	20, 30		
大车运行–操纵室	Trolley Travelling - Room	30, 45		

电动机 Motor (型号/kw)				
主钩起升	Main. Hook Lifting	ZD1 51-4/13 (ZDS1-1.5/13)		
副钩起升	Aux. Hook Lifting	ZD1 32-4/4.5 (ZDS1-0.4/4.5)		
小车运行	Crab Travelling	YDE802-4/0.8*2		
大车运行–地面	Trolley Travelling-ground	YDE 90L-4(D)/1.5*2		
大车运行–操纵室	Trolley Travelling-room	ZDR 100-4/1.5*2	ZDR112L1-4/2.1*2	

电动葫芦	Electric Hoist	HC16; CD1(MD1)						
起升高度 (m)	Lifting Height	9、12、18、24						
工作制度	Working Track Recommended	A3-A5						
电源	Power Source	3-phase A.C.三相交流； 50HZ； 380V						
荐用大车道轨	Trolley Track Recommended	38KG/M						
跨度 (m)	Span	7.5	10.5	13.5	16.5	19.5	22.5	25.5
起重机最大轮压 (KN)	Max. Wheel Presure	65	72	77	80	88	97	102
自重–地面操纵 (KG)	Crane Weight - Ground Controlling	6240	8050	9480	10450	13260	16530	18620
自重–操纵室 (KG)	Crane Weight - Room Controlling	6740	8550	9980	10950	13760	17030	19120

基本尺寸 Basic Dimensions (mm)	B	3500-5696						
	W	3000-4200						
	We	2000-2400						
	K	1600-2250						
	H	1450			1650			
	H1	75			765			
	H2	165	265	315	415	320	420	520
	H3	2390	2490	2540	2640	2545	2645	2745
	H4	365			565			
	b	120			230			
	S1	1250			900			
	S2	1400			1200			

额定起重量 (t)	QSWL Gn Rated Lifting Capacity		5	
操纵形式	Opertional Method	地面操纵	Ground Controlling	操纵室 Room Controlling
速度 Speed (m/min)				
主钩起升	Main. Hook Lifting	8 (8/0.8)		
副钩起升	Aux. Hook Lifting	/		
小车运行	Crab Travelling	20		
大车运行–地面	Trolley Travelling - Ground	20		
大车运行–操纵室	Trolley Travelling - Room	45		

电动机 Motor (型号/kw)				
主钩起升	Main. Hook Lifting	ZD1 41-4/7.5 (ZDS 0.8/7.5)		
副钩起升	Aux. Hook Lifting	/		
小车运行	Crab Travelling	YDE 802-4/0.8*2		
大车运行–地面	Trolley Travelling-ground	YDE 802-4(D)/0.8*2	YDE 90L-4(D)/1.5*2	
大车运行–操纵室	Trolley Travelling-room	ZDR 100-4/1.5*2	ZDR 112L1-4/2.1*2	

电动葫芦	Electric Hoist	CD1(MD1)						
起升高度 (m)	Lifting Height	6、9、12、18、24、30						
工作制度	Working Track Recommended	A3-A5						
电源	Power Source	3-phase A.C.三相交流； 50HZ； 380V						
荐用大车道轨	Trolley Track Recommended	38KG/M						
跨度 (m)	Span	7.5	10.5	13.5	16.5	19.5	22.5	25.5
起重机最大轮压 (KN)	Max. Wheel Presure	39	43	48	53	59	62	71
自重–地面操纵 (KG)	Crane Weight - Ground Controlling	5230	6400	7450	8600	10560	12350	14850
自重–操纵室 (KG)	Crane Weight - Room Controlling	5730	7100	8150	9300	11260	13050	15550

基本尺寸 Basic Dimensions (mm)	B	3200-3900				3700-4200		5300
	W	2700-3100				3200-3600		3800
	We	1200-1500						
	K	1400-1800						
	H	1350						1550
	H1	75						765
	H2	165	165	165	265	365	465	370
	H3	2390	2390	2390	2490	2590	2690	2595
	H4	385						540
	b	120						230
	S1	1200						1200
	S2	1200						1200

QD型吊钩桥式起重机
QD Model Double Girder Overhead Crane




简介 A Brief Introduction


QD型吊钩桥式起重机主要应用于各种室内车间。根据利用登记和载荷状态不用，分为A5和A6两种工作级别。司机室平台入口方向分为侧面入口、端面入口和顶面入口三种，图示为侧面入口，箭头A所示为端面入口，没有门为顶面入口。司机室可以左侧安装也可以右侧安装，图示为左侧安装。大车导电可以用安全滑触线也可以用角钢，既可以在司机室对侧，也可以在司机室同侧。该起重机的动作操作全部在司机室内完成。

QD model double girder overhead crane is mainly used in indoor with A5 or A6 class according to the application and operation frequency. There are three entrance for cabinet: from side or from top. It can be installed at the left side or right side. The power supply way can be safety bus bar or angle iron, it can be the same side of the cabinet or opposite side. All movements of crane shall be control in Cabinet.


技术参数 Technical Data

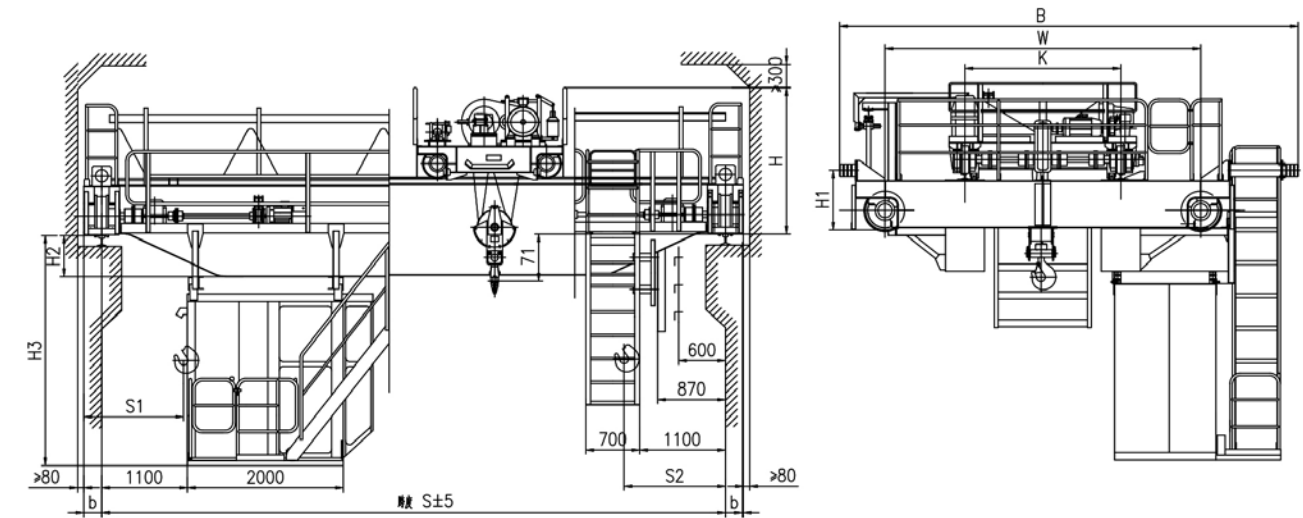


起重量 (t)	Cap	5																			
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5				
起升高度 (m)	Lifting Height	16								16											
工作制度	Duty	A5								A6											
速度 Speed (m/min)																					
起升	Hoisting	9.2								12.6											
小车运行	Crab Travelling	37.2								37.2											
大车运行	Trolley Travelling	68.4				69				90.6				92.8							
极限尺寸 Limt Dimenstion (mm)	S1	800																			
	S2	1250																			
主要尺寸 Main Dimensions (mm)	H	1763																			
	H1	765																			
	H2	-24	126	226	376	526	676	826	976	-24	126	226	376	526	676	826	976				
	H3	2396	2546	2646	2976	2946	3096	3246	3396	2396	2546	2646	2976	2946	3096	3246	3396				
	K	1400																			
	W	3400				3550				5000				3400				3550		5000	
	B	5224				5374				6174				5374				5378		5078	
	b	230																			
	最大轮压 (KN)	Max. Wheel Loading	72	78	84	92	97	109	117	124	73	79	85	93	98	110	118	125			
电机总功率 (KW)	Span	22.8						27.4			27.8						31.8				
荐用钢轨	Crane Rail Recommended	43kg/m																			
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V																			

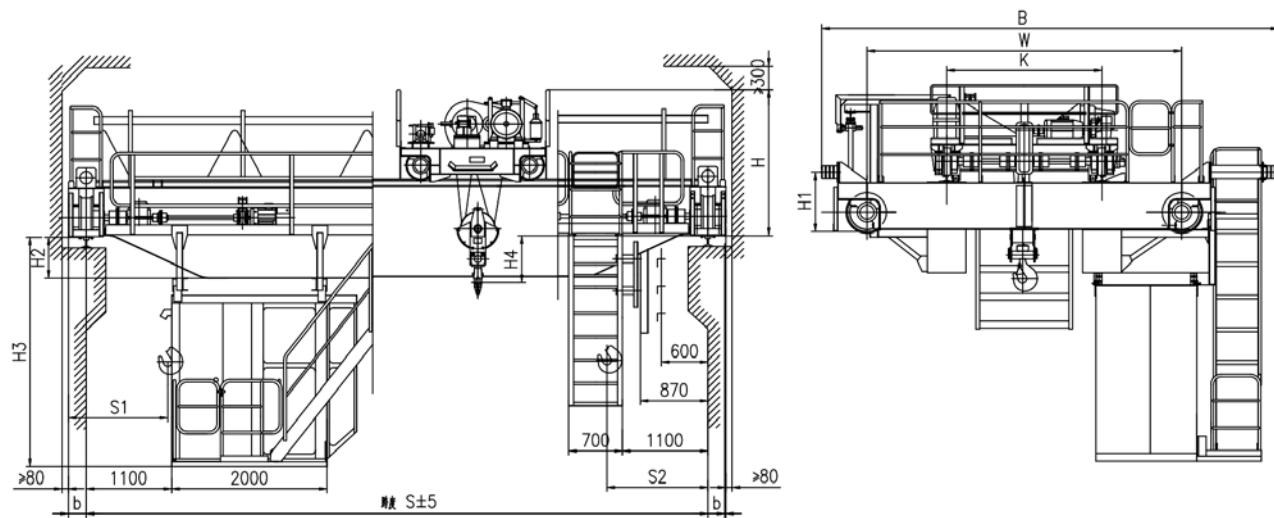


起重量 (t)	Cap	10																		
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5			
起升高度 (m)	Lifting Height	16								16										
工作制度	Duty	A5								A6										
速度 Speed (m/min)																				
起升	Hoisting	8.5								13.3										
小车运行	Crab Travelling	37.2								37.2										
大车运行	Trolley Travelling	69				70.9				92.7				93.7						
极限尺寸 Limt Dimenstion (mm)	S1	1050																		
	S2	1300																		
主要尺寸 Main Dimensions (mm)	H	1876				1926				1876				1926						
	H1	765				815				765				850						
	H2	-24	126	226	376	526	628	828	978	-24	126	226	376	526	678	828	978			
	H3	2396	2546	2646	2796	2946	3048	3248	3398	2396	2546	2646	2796	2946	3098	3248	3398			
	H4	602				552				602				552						
	K	2000																		
	W	4050				5000				4050				5000						
	B	5824				5882				6174				5974				6388		
b		230																		
最大轮压 (KN)	Max. Wheel Loading	101	108	117	122	129	141	150	158	102	109	118	123	130	143	152	160			
电机总功率 (KW)	Span	27.5				32.1				35.5				39.5						
荐用钢轨	Crane Rail Recommended	43kg/m																		
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V																		

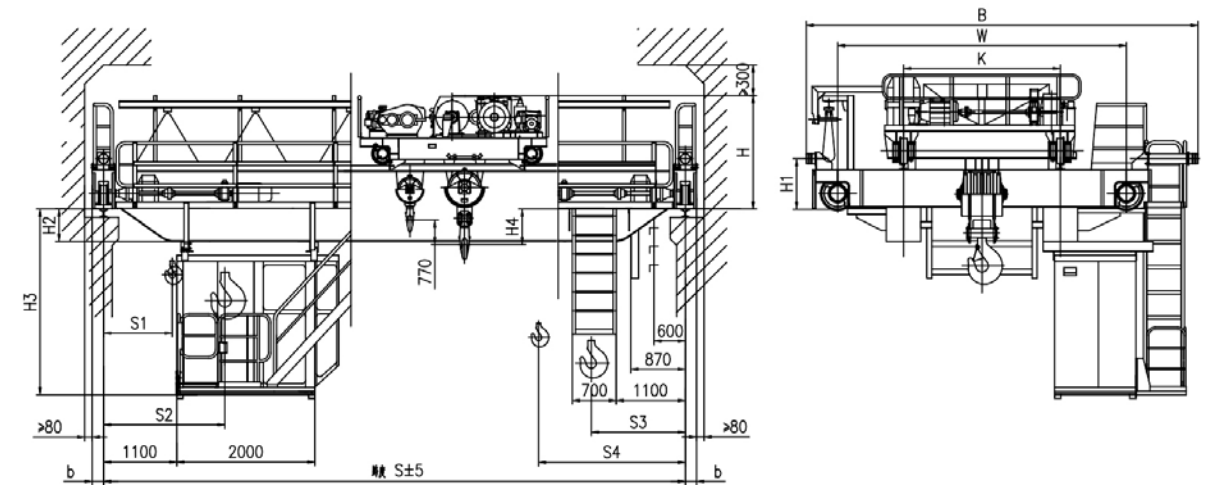


起重量-主钩 (t)	Cap-Main	16															
起重量-副钩 (t)	Cap-Aux.	3.2															
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度-主钩 (m)	Lifting Height-Main	16								16							
起升高度-副钩 (m)	Lifting Height-Aux.	18								18							
工作制度	Duty	A5								A6							
速度 Speed (m/min)																	
起升-主起升	Main	7.9								10.7							
起升-副起升	Aux.	11.2								11.2							
小车运行	Crab Travelling	36.3								36.3							
大车运行	Trolley Travelling	74.7				75.5				86.5				87			
极限尺寸 Limt Dimenstion (mm)	S1	1040															
	S2	1850															
	S3	1500															
	S4	2310															
主要尺寸 Main Dimensions (mm)	H	2095			2185					2095	2097	2187	2185				
	H1	815			905								940				
	H2	178	178	278	428	578	728	878	978	178	178	278	428	578	728	878	978
	H3	2598	2598	2698	2848	2998	3148	3298	3398	2598	2598	2698	2848	2998	3148	3298	3398
	H4	748			639					729	727		637	639			
	K	2000															
	W	4000			4100		5000			4400			4400		5000		
	B	5998			5998		6438			6278			6318		6798		
	b	230			260					230			260				
最大轮压 (KN)	Max. Wheel Loading	140	148	154	168	175	187	196	205	145	152	160	172	180	191	201	211
电机总功率 (KW)	Span	51.1			55.5					64.5			71.5				
荐用钢轨	Crane Rail Recommended	43kg/m 或 QU70															
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V															

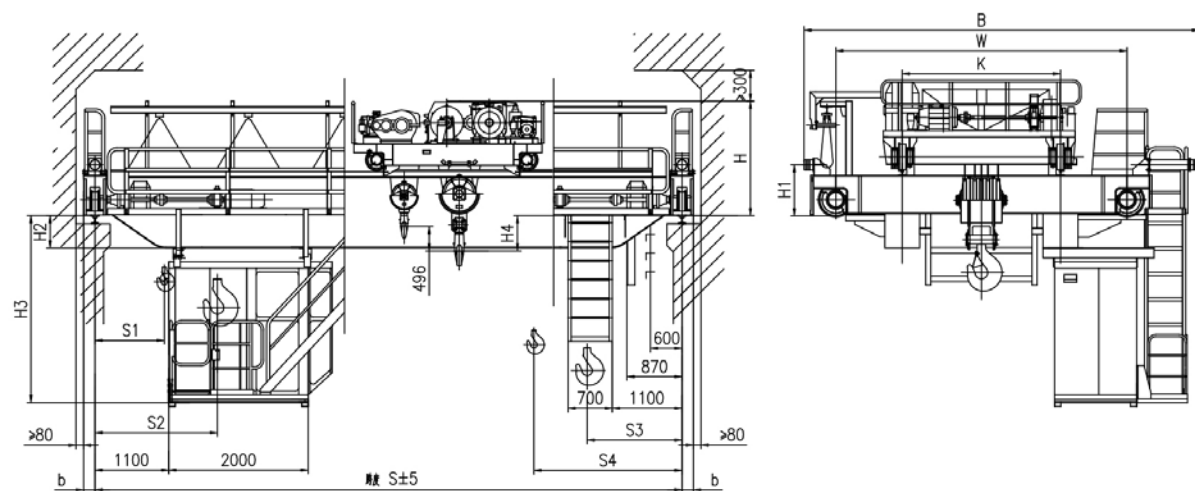


起重量-主钩 (t)	Cap-Main	20																		
起重量-副钩 (t)	Cap-Aux.	5																		
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5			
起升高度-主钩 (m)	Lifting Height-Main	12									12									
起升高度-副钩 (m)	Lifting Height-Aux.	14									14									
工作制度	Duty	A5									A6									
速度 Speed (m/min)																				
起升-主起升	Main	7.1									9.7									
起升-副起升	Aux.	9.2									9.2									
小车运行	Crab Travelling	36.6									36.6									
大车运行	Trolley Travelling	74.7							75.5		86.5							87		
极限尺寸 Limt Dimenstion (mm)	S1	1030																		
	S2	1930																		
	S3	1420																		
	S4	2320																		
主要尺寸 Main Dimensions (mm)	H	2097			2187						2097	2099		2189						
	H1	815			905						815			940						
	H2	178	178	278	428	578	728	878	978	178	180	280	430	580	730	880	980			
	H3	2598	2598	2698	2848	2998	3148	3298	3398	2598	2600	2700	2850	3000	3150	3300	3400			
	H4	720			720						720			718						
	K	2000																		
	W	4000			4100		5000			4400					5000					
	B	5998			5998		6438			6278			6188		6798					
	b	230			260						230			260						
最大轮压 (KN)	Max. Wheel Loading	162	169	178	191	199	211	222	231	167	174	183	197	205	218	229	238			
电机总功率 (KW)	Span	55.6			60						69			76						
荐用钢轨	Crane Rail Recommended	43kg/m 或 QU70																		
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V																		

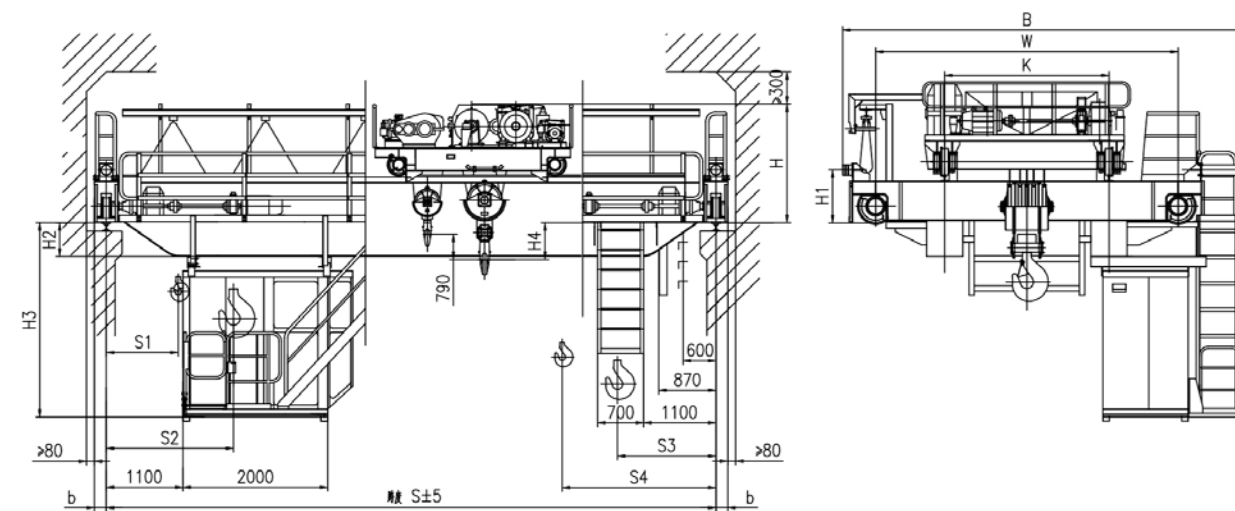


起重量-主钩 (t)	Cap-Main	32																	
起重量-副钩 (t)	Cap-Aux.	5																	
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5		
起升高度-主钩 (m)	Lifting Height-Main	16									16								
起升高度-副钩 (m)	Lifting Height-Aux.	18									18								
工作制度	Duty	A5									A6								
速度 Speed (m/min)																			
起升-主起升	Main	6.3									7.8								
起升-副起升	Aux.	9.2									9.2								
小车运行	Crab Travelling	29.8									29.8								
大车运行	Trolley Travelling	64.6			65.3						89								
极限尺寸 Limt Dimenstion (mm)	S1	1070																	
	S2	2050																	
	S3	1700																	
	S4	2680																	
主要尺寸 Main Dimensions (mm)	H	2347	2349		2479						2347	2351		2481					
	H1	905			1035						905			1070					
	H2	190	240	390	540	690	840	940	1040	190	242	392	542	692	842	942	1042		
	H3	2610	2660	2810	2960	3110	3260	3360	3460	2610	2662	2812	2962	3112	3262	3362	3462		
	H4	705			703						705			701					
	K	2500																	
	W	4650			4700		5000			4650			4700		5000				
	B	6478			6628		6928			6588			6608		6828				
	b	260			300						260			300					
最大轮压 (KN)	Max. Wheel Loading	236	250	262	277	289	305	316	327	240	254	267	284	296	311	321	333		
电机总功率 (KW)	Span	78.3						87.3			96.3								
荐用钢轨	Crane Rail Recommended	43kg/m 或 QU70																	
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V																	

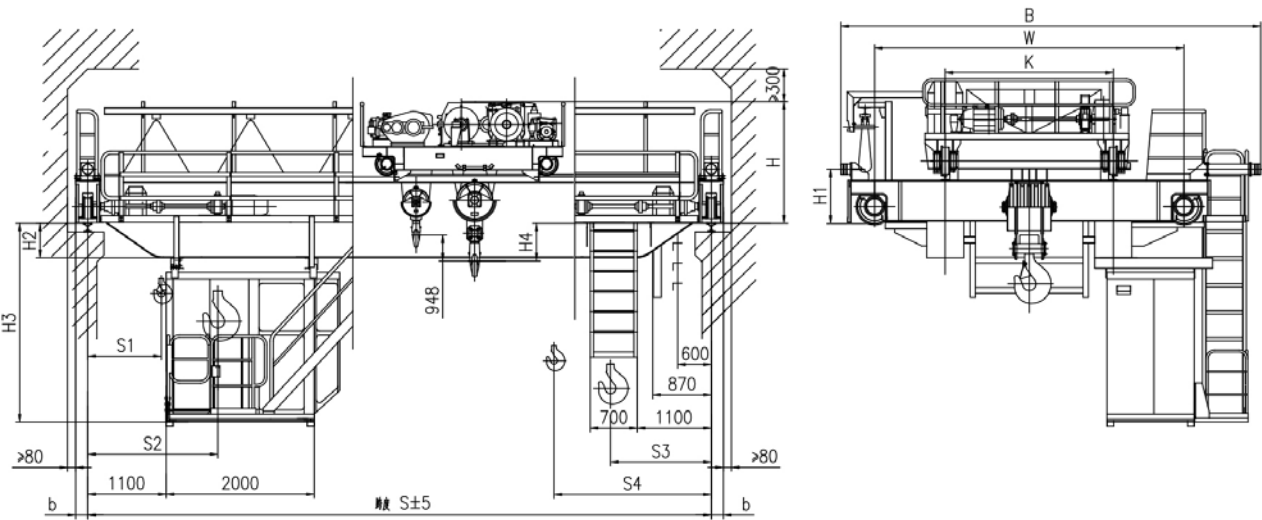


起重量-主钩 (t)	Cap-Main	50																
起重量-副钩 (t)	Cap-Aux.	10																
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	
起升高度-主钩 (m)	Lifting Height-Main	12								12								
起升高度-副钩 (m)	Lifting Height-Aux.	16								16								
工作制度	Duty	A5								A6								
速度 Speed (m/min)																		
起升-主起升	Main	5.9								7.8								
起升-副起升	Aux.	8.5								8.5								
小车运行	Crab Travelling	31								31								
大车运行	Trolley Travelling	75				76				75				76.4				
极限尺寸 Limt Dimenstion (mm)	S1	1005																
	S2	2200																
	S3	2000																
	S4	3195																
主要尺寸 Main Dimensions (mm)	H	2746				2752				2746	2748	2754						
	H1	1055				1090				1055				1090				
	H2	194	246	396	252	402	552	702	802	194	248	398	254	404	554	704	804	
	H3	2614	2666	2816	2672	2822	2972	3122	3222	2614	2668	2818	2674	2824	2974	3124	3224	
	H4	1020			1014					1020	1018	1012						
	K	2500																
	W	4800					5000			4800					5000			
	B	6828				6858		7058			6828			6858		7058		
	b	300																
	最大轮压 (KN)	Max. Wheel Loading	332	354	373	385	404	421	434	449	335	357	377	395	410	427	440	455
电机总功率 (KW)	Span	115.5								131.5				139.5				
荐用钢轨	Crane Rail Recommended	QU80 或 方钢100																
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V																

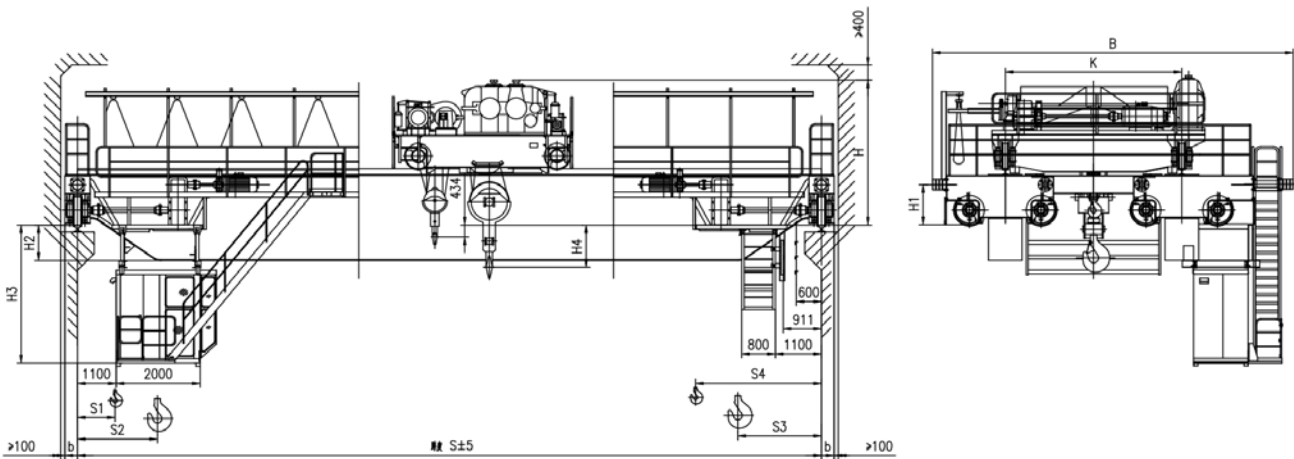


起重量-主钩 (t)	Cap-Main	75															
起重量-副钩 (t)	Cap-Aux.	20															
跨度 (m)	Span	13.5	16.5	19.5	22.5	25.5	28.5	31.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5		
起升高度-主钩 (m)	Lifting Height-Main	20															
起升高度-副钩 (m)	Lifting Height-Aux.	22															
工作制度	Duty	A5								A6							
速度 Speed (m/min)																	
起升-主起升	Main	3.8								5							
起升-副起升	Aux.	7.2								7.2							
小车运行	Crab Travelling	38.4								38.4							
大车运行	Trolley Travelling	53.9								77.8				67			
极限尺寸 Limt Dimenstion (mm)	S1	1015															
	S2	3260															
	S3	2475															
	S4	3720															
主要尺寸 Main Dimensions (mm)	H	3302		3302	3306	3304	3308	3310	3302		3304	3308	3306	3310	3312		
	H1	950															
	H2	290	440	542	546	844	844	850	292	442	544	548	846	850	852		
	H3	2710	2860	2962	2966	3264	3268	3270	2712	2862	2964	2968	3266	3270	3272		
	H4	872	872	872	868	870	866	864	870	870	868	864	866	862	860		
	K	4400															
	B	8828															
	b	300															
	最大轮压 (KN)	Max. Wheel Loading	255	268	278	290	302	309	310	257	271	282	294	303	314	322	
电机总功率 (KW)	Span	128					136			158							
荐用钢轨	Crane Rail Recommended	QU100															
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V															

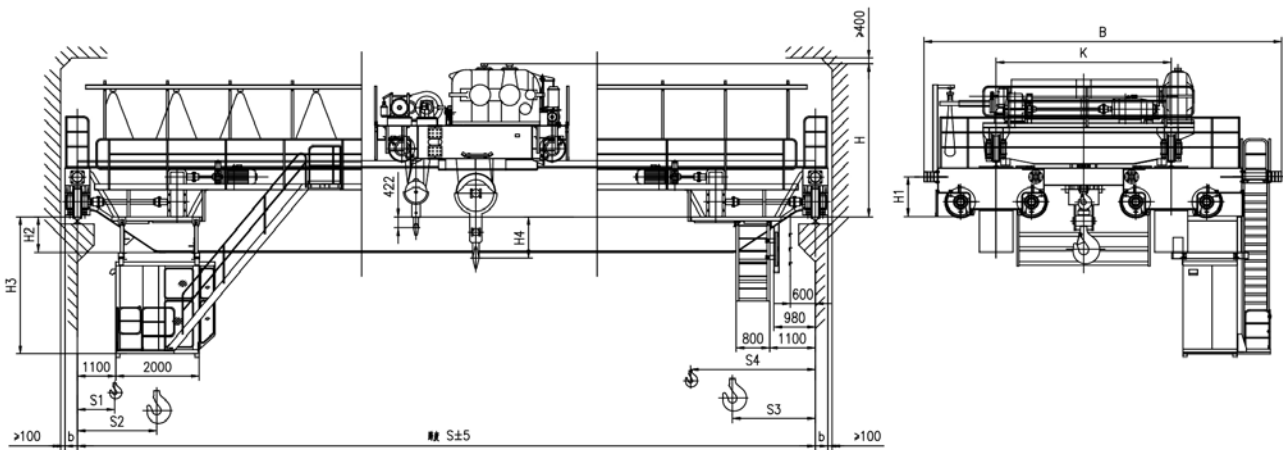


起重量-主钩 (t)	Cap-Main	100													
起重量-副钩 (t)	Cap-Aux.	20													
跨度 (m)	Span	13	16	19	22	25	28	31	13	16	19	22	25	28	31
起升高度-主钩 (m)	Lifting Height-Main	18							18						
起升高度-副钩 (m)	Lifting Height-Aux.	20							20						
工作制度	Duty	A5							A6						
速度 Speed (m/min)															
起升-主起升	Main	3.1							3.9						
起升-副起升	Aux.	7.2							7.2						
小车运行	Crab Travelling	33.9							33.9						
大车运行	Trolley Travelling	61.7							61.8						
极限尺寸 Limt Dimenstion (mm)	S1	985													
	S2	2300													
	S3	2650													
	S4	3965													
主要尺寸 Main Dimensions (mm)	H	3434	3434	3436	3442	3442	3444	3446	3434	3436	3438	3444	3444	3446	3448
	H1	950													
	H2	538	540	542	548	848	850	952	540	542	544	550	850	852	954
	H3	2958	2960	2962	2968	3268	3270	3372	2960	2962	2964	2970	3270	3272	3374
	H4	1330	1330	1328	1322	1322	1320	1318	1330	1328	1326	1320	1320	1318	1316
	K	4400													
	B	8868													
	b	310													
	最大轮压 (KN)	Max. Wheel Loading	320	335	350	365	376	386	397	321	338	350	367	380	390
电机总功率 (KW)	Span	136			154				158			174			
荐用钢轨	Crane Rail Recommended	QU100													
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V													

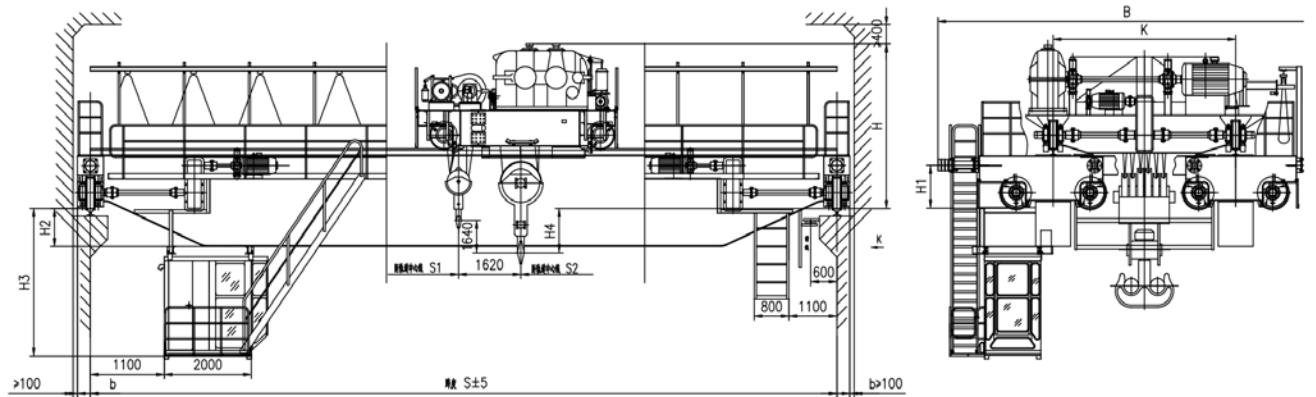


起重量-主钩 (t)	Cap-Main	125														
起重量-副钩 (t)	Cap-Aux.	32														
跨度 (m)	Span	13	16	19	22	25	28	31	13	16	19	22	25	28	31	
起升高度-主钩 (m)	Lifting Height-Main	18							18							
起升高度-副钩 (m)	Lifting Height-Aux.	20							20							
工作制度	Duty	A5							A6							
速度 Speed (m/min)																
起升-主起升	Main	3.5							3.6							
起升-副起升	Aux.	7.5							7.5							
小车运行	Crab Travelling	33							33							
大车运行	Trolley Travelling	59.56			59.2					59.7			67			
极限尺寸 Limt Dimenstion (mm)	S1	1200														
	S2	2500														
主要尺寸 Main Dimensions (mm)	H	3676	3676	3680	3682	3686	3686	3688	3676	3678	3682	3684	3688	3688	3689	
	H1	950														
	H2	540	542	846	848	852	1052	1254	542	544	848	850	854	1054	1255	
	H3	2960	2962	3266	3268	3272	3472	3674	2962	2964	3268	3270	3274	3474	3675	
	H4	1560	1560	1556	1554	1556	1550	1548	1560	1588	1554	1552	1548	1548	1547	
	K	4400														
	B	8868				9008				8868				9008		
	b	310														
	最大轮压 (KN)	Max. Wheel Loading	388	408	430	445	459	470	492	390	410	432	445	462	476	489
电机总功率 (KW)	Span	179.5			197.5				194.5			210.5				
荐用钢轨	Crane Rail Recommended	QU100														
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V														

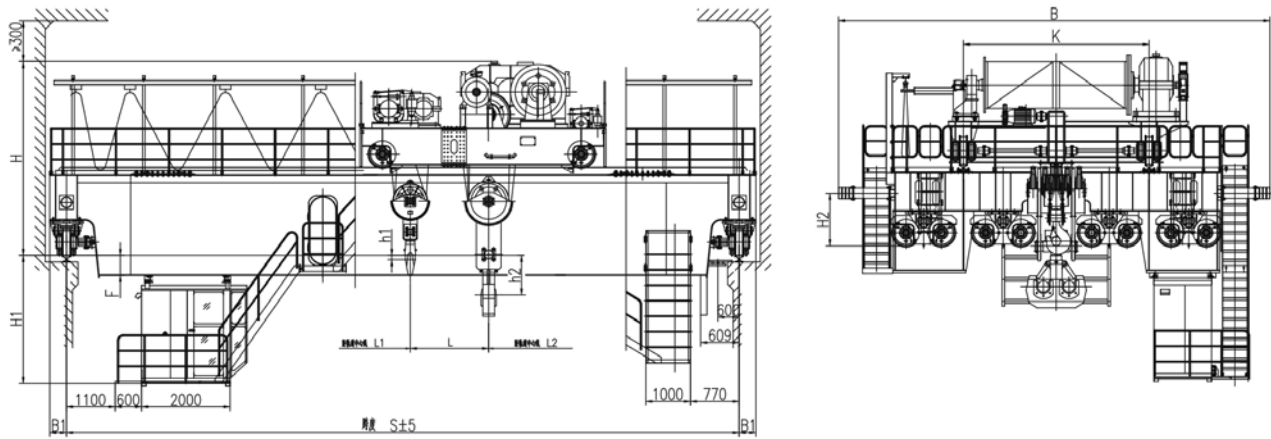

起重量-主钩 (t)	Cap-Main	150								160								
起重量-副钩 (t)	Cap-Aux.	32								32								
跨度 (m)	Span	13	16	19	22	25	28	31	13	16	19	22	25	28	31			
起升高度-主钩 (m)	Lifting Height-Main	22								20								
起升高度-副钩 (m)	Lifting Height-Aux.	24								22								
工作制度	Duty	A5								A5								
速度 Speed (m/min)																		
起升-主钩	Main	3.7								3.2								
起升-副钩	Aux.	7.5								5.9								
小车运行	Crab Travelling	40								22.5								
大车运行	Trolley Travelling	68								57								
极限尺寸 Limt Dimenstion (mm)	L1	980								1392								
	L2	2500								2727								
	L	1700								1825								
	h2	1200								535				533				
	h1	50								240				238				
主要尺寸 Main Dimensions (mm)	H	4600								4496				4498				
	H1	3000					3150			2857				2957				
	B	9900								9900								
	K	4600								4400								
	B1	400								385								
	F	500					650			437					537			
	最大轮压 (KN)	Max. Wheel Loading	262	283	294	304	312	319	326	272	293	300	315	324	331	338		
电机总功率 (KW)	Span	196	196	208	208	216	216	216	232				260					
荐用钢轨	Crane Rail Recommended	QU120								QU120								
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V								三相交流 3-Phase A.C. 50HZ 380V								

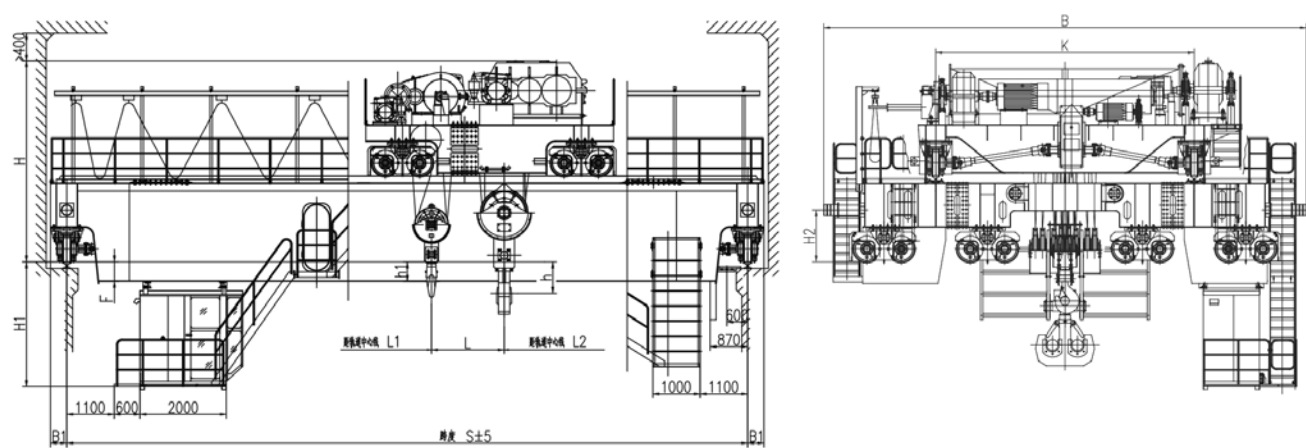


起重量-主钩 (t)	Cap-Main	200								250							
起重量-副钩 (t)	Cap-Aux.	50								30							
跨度 (m)	Span	13	16	19	22	25	28	31	13	16	19	22	25	28	31		
起升高度-主钩 (m)	Lifting Height-Main	20								20							
起升高度-副钩 (m)	Lifting Height-Aux.	22								22							
工作制度	Duty	A5								A5							
速度 Speed (m/min)																	
起升-主钩	Main	2.6								2.2							
起升-副钩	Aux.	7.7								7.7							
小车运行	Crab Travelling	32								32							
大车运行	Trolley Travelling	48								50							
极限尺寸 Limit Dimenstion (mm)	L1	1600								1600							
	L2	2800								3100							
	L	2000								2000							
	h	1500								1800							
	h1	700								1000							
主要尺寸 Main Dimensions (mm)	H	5300								5300							
	H1	2740				2890				3150				3300			
	B	11200								12000							
	K	5000								6000							
	B1	400								450							
	F	320				470				650				800			
	最大轮压 (KN)	Max. Wheel Loading	326	344	358	372	390	400	410	356	370	380	408	430	440	450	
电机总功率 (KW)	Span	239	239	263	263	263	279	279	239	239	263	263	263	279	279		
荐用钢轨	Crane Rail Recommended	QU120								QU120							
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V								三相交流 3-Phase A.C. 50HZ 380V							

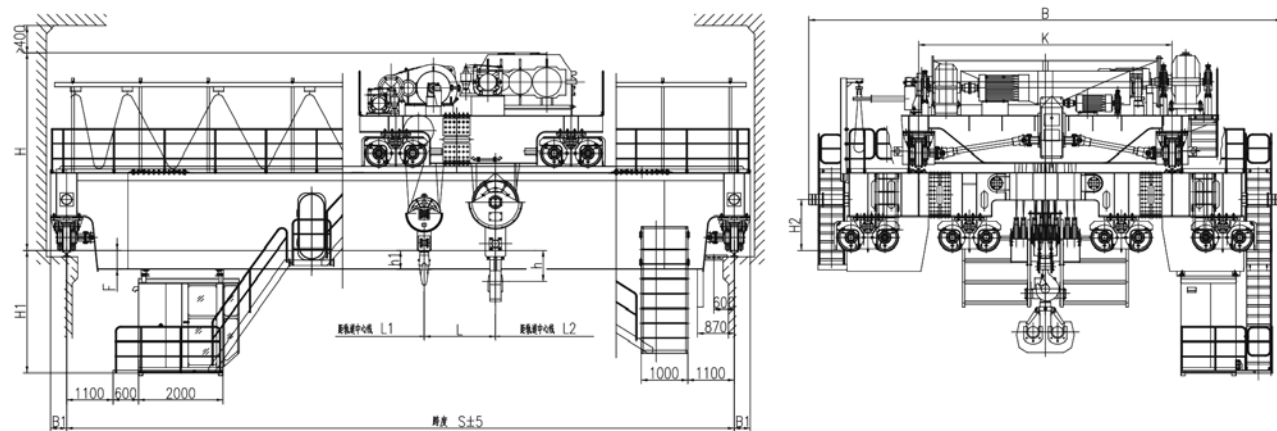

起重量-主钩 (t)	Cap-Main	300								350							
起重量-副钩 (t)	Cap-Aux.	75								80							
跨度 (m)	Span	13	16	19	22	25	28	31	13	16	19	22	25	28	31		
起升高度-主钩 (m)	Lifting Height-Main	24								24							
起升高度-副钩 (m)	Lifting Height-Aux.	26								26							
工作制度	Duty	A5								A5							
速度 Speed (m/min)																	
起升-主钩	Main	2.4								2.2							
起升-副钩	Aux.	6.8								6.8							
小车运行	Crab Travelling	28								28							
大车运行	Trolley Travelling	42								42							
极限尺寸 Limt Dimenstion (mm)	L1	1700								1500							
	L2	3500								2800							
	L	2450								2400							
	h	1900								1500							
	h1	520								520							
主要尺寸 Main Dimensions (mm)	H	5850								5850							
	H1	3000				3200				3000				3200			
	B	12100								12300							
	K	6000								6200							
	B1	450								450							
	F	500				700				500				700			
最大轮压 (KN)	Max. Wheel Loading	480	495	510	525	540	550	565	507	534	555	571	586	599	613		
电机总功率 (KW)	Span	485	485	501	501	537	537	537	485	485	501	501	537	537	537		
荐用钢轨	Crane Rail Recommended	QU120								QU120							
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V								三相交流 3-Phase A.C. 50HZ 380V							

LHB型防爆双梁桥式起重机

LHB Model Explosion Proof Double Girder Overhead Crane

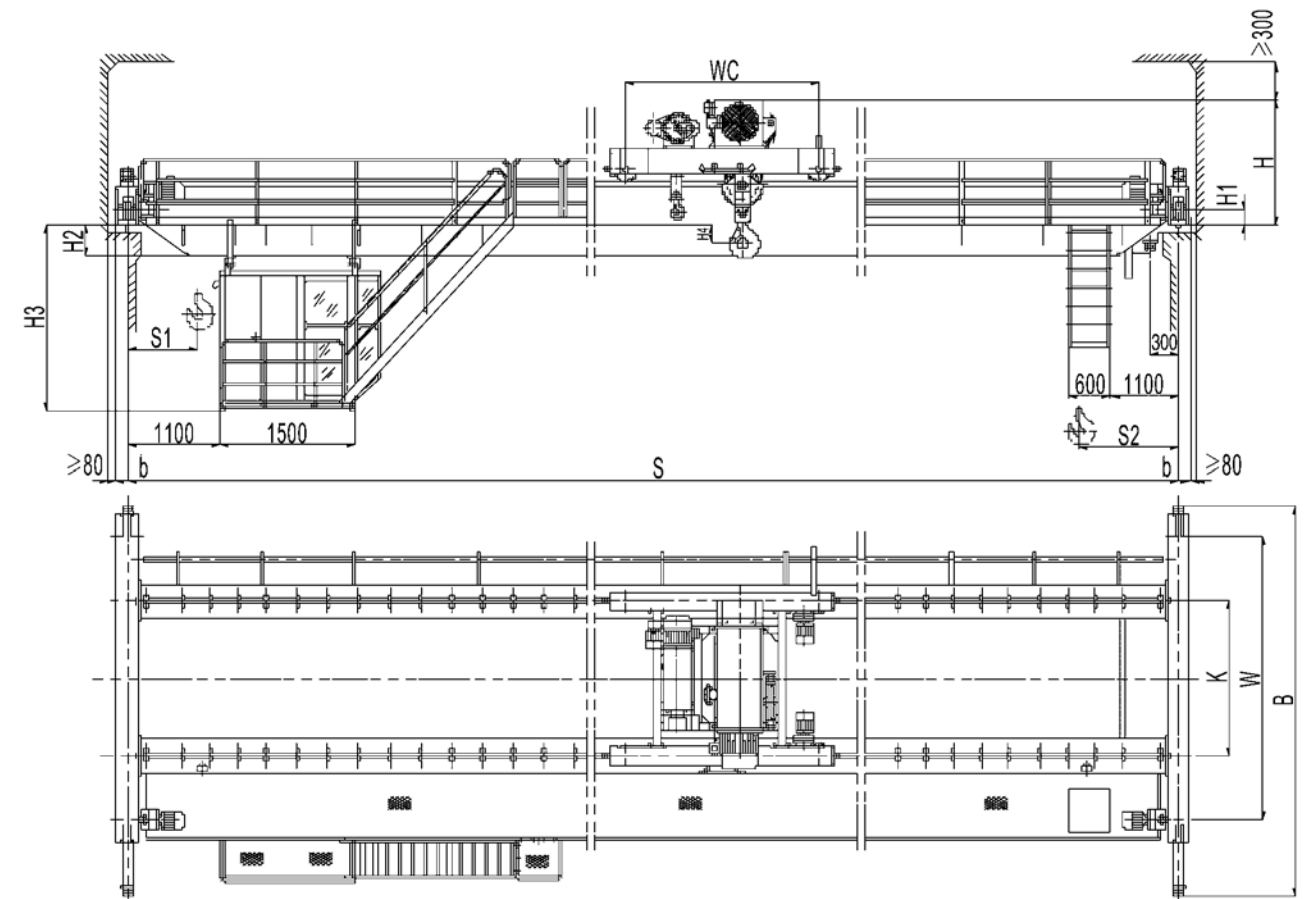

简介 A Brief Introduction

本起重机根据GB3836.1-2000《爆炸性气体环境用防爆电气设备第一部分：通用要求》及GB3836.2-2000《爆炸性气体环境用防爆电气设备 第二部分：隔爆型“d”》的规定，电机、电器为隔爆型，防爆级别ExdII CT4时，运行机构进行防火花处理。整机符合JB/T10219-2001《防爆梁式起重机》的规定，防爆等级分别为Exd II BT4, Exd II CT4。整机与HB型防爆电动葫芦小车配套使用。

工作级别为A3-A4, 工作环境温度 $-25^{\circ}\text{C}\sim 40^{\circ}\text{C}$ 。

LHB type overhead crane is designed according to GB3836.1-2000 "Explosive gas atmosphere use explosion-proof electric equipment Part 1: Common requirements" and GB3836.2-2000 "Explosive gas atmosphere use explosion-proof electric equipment Part 2: flameproof type 'd'", motor and electrical appliance of explosion proof wire rope electric hoist are explosion proof type. When explosion proof grade is Exd II CT4, traveling mechanism should do spark proof treatment. The whole machine meets standards of JB/T10219-2001 "Explosion proof crane", explosion proof grade has Exd II BT4 and Exd II CT4. It can be used together with HB explosion proof electric hoist.

The work duty class is A3-A4, working ambient tempt is $-25^{\circ}\text{C}\sim 40^{\circ}\text{C}$.

LHB型起重机适用于工厂内具有防爆级别不高于B级或C级，引燃温度组别不低于T4 (135℃)组的可燃性气体，蒸汽与空气形成的爆炸性气体环境中，所适用的危险区域为1区或2区，不适用于0区。

注：
0区：在正常情况下，爆炸性气体混合物连续的，短时间频繁出现或者长时间存在的场所。
1区：在正常情况下，爆炸性气体混合物有可能出现的场所。
2区：在正常情况下，爆炸性气体混合物不能出现，仅在不正常情况下既有可能发生设备故障或误操作情况下，偶尔短时间出现的场所。

LHB model explosion proof overhead crane adapts to the environment in factory that have explosive gas formed by inflammable gas, steam and air of which explosion proof grade is less than B grade or C grade and ignition group is more than T4 (135℃) group. And the explosion proof electric hoist adapts to zone 1 or zone 2, not zone 0.

Remark:
Zone 0: Under normal circumstances, the situation that explosive gas mixture appears continuously in a very short time or exist for a long time.
Zone 1: Under normal circumstances, the situation that explosive gas mixture maybe appears.
Zone 2: Under normal circumstances, the situation that explosive gas mixture can't appear. But under abnormal circumstances that equipment is out of order or mis-operation takes place, the explosive gas mixture appears occasionally in a short time.

LHB型起重机所适用的危险气体举例见下表， 未列入表内的其他危险气体见GB3836.1之附录。

Dangerous gas that explosion proof overhead crane can be used in is listed as follows. Refer to the appendix of GB3836.1 for other dangerous gas that has not been listed into the follow table.

防爆标志（类别，级别） Explosion-proof mark (sorts, grade)	危险气体举例 Dangerous gas
Exd II BT4	乙烷、丙烷、丁烷、庚烷、癸烷、乙烯、丙烯、一氧化碳、汽油、丙酮、苯乙烯、甲苯、苯、甲醇、乙醇、聚乙烯、乙醛、二乙醚。 Ethane, propane, butane, heptane, decane, ethylene, propylene, carbon monoxide, petrol, acetone, styrene, toluene, benzene, carbinol, ethanol, chloroethylene, acetaldehyde, diethyl, ether.
Exd II CT4	氢气，水煤气，乙炔及Exd IIBT4以外的气体 Hydrogen gas, water gas, acetylene and the gas except ExdIIBT4.

技术参数 Technical Data

额定起重量 (t)	QSWL Gn Rated Lifting Capacity	5
操纵形式	Opertional Method	地面操纵 Ground Controlling
速度 Speed (m/min)		
主钩起升	Main. Hook Lifting	8 (8/0.8)
副钩起升	Aux. Hook Lifting	/
小车运行	Crab Travelling	20
大车运行	Trolley Travelling	20, 25

电动机 Motor (型号/kw)		
主钩起升	Main. Hook Lifting	BZD ₁ 41-4/7.5 (BZDS ₁ 0.8/7.5)
副钩起升	Aux. Hook Lifting	/
小车运行	Crab Travelling	BZDY(D) 21-4/0.8*2
大车运行	Trolley Travelling	BZDY(D) 21-4/0.8*2

电动葫芦	Electric Hoist	HB, BCD ₁ , BMD ₁						
起升高度 (m)	Lifting Height	6, 9, 12, 18, 24, 30						
工作制度	Working Track Recommended	A3-A4						
电源	Power Source	3-phase A.C.三相交流； 50HZ； 380V						
荐用大车道轨	Trolley Track Recommended	38KG/M						
跨度 (m)	Span	7.5	10.5	13.5	16.5	19.5	22.5	25.5
起重机最大轮压 (KN)	Max. Wheel Presure	39	43	48	53	59	62	71
自重 (KG)	Crane Weight	5230	6400	7450	8600	10560	12350	14850

基本尺寸 Basic Dimensions (mm)	B	3200-3900				3700-4200		4600
	W	2700-3100				3200-3600		3800
	We	1200-1500						
	K	1400-1800						
	H	1350						1550
	H1	75						765
	H2	165	265	365		465	370	
	H3	385						540
	b	120						230
	S1	1200						1200
	S2	1200						1200

额定起重量 (t)	QSWL Gn Rated Lifting Capacity				32/10			
操纵形式	Opertional Method				地面操纵 Ground Controlling			
速度 Speed (m/min)								
主钩起升	Main. Hook Lifting				3 (0.3/3)			
副钩起升	Aux. Hook Lifting				7 (7/0.7)			
小车运行	Crab Travelling				20			
大车运行	Trolley Travelling				20, 25			
电动机 Motor (型号/kw)								
主钩起升	Main. Hook Lifting				BZDX 62-6/18.5 (BZDS 2.2/18.5)			
副钩起升	Aux. Hook Lifting				BZD ₁ 51-4/13 (BZDS ₁ -1.5/13)			
小车运行	Crab Travelling				BZDY ₁ 23-4/2.2*2			
大车运行	Trolley Travelling				BZDY ₁ 23-4/2.2*2		BZDY ₁ 31-4/3*2	
电动葫芦	Electric Hoist				HB, BCD ₁ , BMD ₁			
起升高度 (m)	Lifting Height				9, 12, 16, 24			
工作制度	Working Track Recommended				A3-A4			
电源	Power Source				3-phase A.C.三相交流; 50HZ; 380V			
荐用大车道轨	Trolley Track Recommended				43KG/M			
跨度 (m)	Span	7.5	10.5	13.5	16.5	19.5	22.5	25.5
起重机最大轮压 (KN)	Max. Wheel Presure	167	184	196	206	215	224	233
自重 (KG)	Crane Weight	12530	14660	16360	18870	21650	24260	27060
基本尺寸 Basic Dimensions (mm)	B	5070-5960			5572-6222			
	W	3600-4500						
	We	2200-2900						
	K	1600-2500						
	H	1900						
	H1	765						
	H2	170	270	370	470	570	670	770
	H3	-700						
	b	230						
	S1	1100						
	S2	1600						


额定起重量 (t)	QSWL Gn Rated Lifting Capacity				20/5			
操纵形式	Opertional Method				地面操纵 Ground Controlling			
速度 Speed (m/min)								
主钩起升	Main. Hook Lifting				4.2, 0.42/4.2			
副钩起升	Aux. Hook Lifting				8 (8/0.8)			
小车运行	Crab Travelling				20			
大车运行	Trolley Travelling				20, 25			
电动机 Motor (型号/kw)								
主钩起升	Main. Hook Lifting				BZD ₁ 52-4/18.5			
副钩起升	Aux. Hook Lifting				BZD ₁ 41-4/7.5 (BZDS ₁ -0.8/7.5)			
小车运行	Crab Travelling				BZDY ₁ (D) 22-4/1.5*2			
大车运行	Trolley Travelling				BZDY ₁ 22-4/1.5*2		BZDY ₁ 23-4/2.2*2	
电动葫芦	Electric Hoist				HB, BCD ₁ , BMD ₁			
起升高度 (m)	Lifting Height				9, 12, 18, 24			
工作制度	Working Track Recommended				A3-A4			
电源	Power Source				3-phase A.C.三相交流; 50HZ; 380V			
荐用大车道轨	Trolley Track Recommended				43KG/M			
跨度 (m)	Span	7.5	10.5	13.5	16.5	19.5	22.5	25.5
起重机最大轮压 (KN)	Max. Wheel Presure	118	129	135	148	156	164	169
自重 (KG)	Crane Weight	10500	11500	13640	15980	17700	20300	22920
基本尺寸 Basic Dimensions (mm)	B	4632-5982						
	W	3750-4500						
	We	2310-2750						
	K	1600-2500						
	H	1790						
	H1	765						850
	H2	170	170	270	370	370	520	620
	H3	-350						
	b	230						
	S1	1100						
	S2	1100						

额定起重量 (t)	QSWL Gn Rated Lifting Capacity				16/3				
操纵形式	Opertional Method				地面操纵 Ground Controlling				
速度 Speed (m/min)									
主钩起升	Main. Hook Lifting				3.5 (3.5/0.35)				
副钩起升	Aux. Hook Lifting				8 (8/0.8)				
小车运行	Crab Travelling				20				
大车运行	Trolley Travelling				20, 25				
电动机 Motor (型号/kw)									
主钩起升	Main. Hook Lifting				BZD ₁ 51-4/13 (BZDS ₁ -1.5/13)				
副钩起升	Aux. Hook Lifting				BZD ₁ 32-4/4.5 (BZDS ₁ -0.4/4.5)				
小车运行	Crab Travelling				BZDY ₁ (D) 22-4/1.5*2				
大车运行	Trolley Travelling				BZDY ₁ (D) 22-4/1.5*2		BZDY ₁ (D) 23-4/2.2*2		
电动葫芦	Electric Hoist				HB, BCD ₁ , BMD ₁				
起升高度 (m)	Lifting Height				9, 12, 18, 24				
工作制度	Working Track Recommended				A3-A4				
电源	Power Source				3-phase A.C.三相交流; 50HZ; 380V				
荐用大车道轨	Trolley Track Recommended				38KG/M				
跨度 (m)	Span	7.5	10.5	13.5	16.5	19.5	22.5	25.5	
起重机最大轮压 (KN)	Max. Wheel Presure	95	102	110	119	127	134	141	
自重 (KG)	Crane Weight	7970	8610	9990	12800	15300	17540	20080	
基本尺寸 Basic Dimensions (mm)	B	3500-5696							
	W	3000-4200							
	We	2000-2400							
	K	1600-2250							
	H	1450			1650				
	H1	75			765				
	H2	265	365	465	370	470	570	670	
	H3	-500			-310				
	b	120			230				
	S1	1240			900				
	S2	1450			1200				

额定起重量 (t)	QSWL Gn Rated Lifting Capacity				10/3			
操纵形式	Opertional Method				地面操纵 Ground Controlling			
速度 Speed (m/min)								
主钩起升	Main. Hook Lifting				7 (7/0.7)			
副钩起升	Aux. Hook Lifting				8 (8/0.8)			
小车运行	Crab Travelling				20			
大车运行	Trolley Travelling				20, 25			
电动机 Motor (型号/kw)								
主钩起升	Main. Hook Lifting				BZD ₁ 51-4/13 (BZDS ₁ -1.5/13)			
副钩起升	Aux. Hook Lifting				BZD ₁ 32-4/4.5 (BZDS ₁ -0.4/4.5)			
小车运行	Crab Travelling				BZDY ₁ (D) 21-4/0.8*2			
大车运行	Trolley Travelling				BZDY ₁ (D) 22-4/1.5*2			
电动葫芦	Electric Hoist				HB, BCD ₁ , BMD ₁			
起升高度 (m)	Lifting Height				9, 12, 18, 24			
工作制度	Working Track Recommended				A3-A4			
电源	Power Source				3-phase A.C.三相交流; 50HZ; 380V			
荐用大车道轨	Trolley Track Recommended				38KG/M			
跨度 (m)	Span	7.5	10.5	13.5	16.5	19.5	22.5	25.5
起重机最大轮压 (KN)	Max. Wheel Presure	65	72	77	80	88	97	102
自重 (KG)	Crane Weight	6240	8050	9480	10450	13260	16530	18620
基本尺寸 Basic Dimensions (mm)	B	3500-5696						
	W	3000-4200						
	We	2000-2400						
	K	1600-2250						
	H	1450				1650		
	H1	75				765		
	H2	165	265	315	415	320	420	520
	H3	365				565		
	b	120				230		
	S1	1250				900		
	S2	1400				1200		

QB型防爆双梁桥式起重机

QB Model Explosion Proof Double Girder Overhead Crane

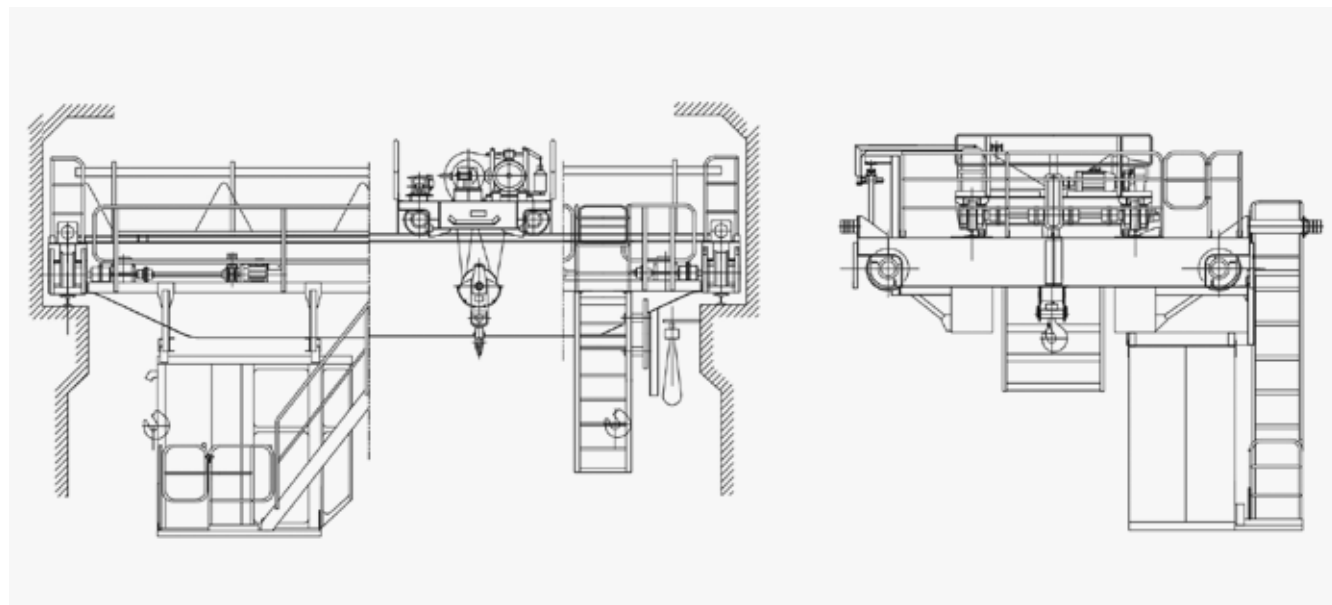

简介 A Brief Introduction


QB型防爆双梁桥式起重机所有电机电器防爆性能符合GB3836.2-2000《爆炸性气体环境用防爆电气设备第二部分：隔爆型“d”》，整机性能符合JB/T5897-2006《防爆桥式起重机》标准之规定，经国家制定的防爆产品检验单位检验合同，取得了《防爆合格证》。防爆标志分别为ExdII BT4和ExdII CT4。

本产品适用于工厂内传爆能力不高于IIB或IIC级，引爆温度组别为T1-T4组的可燃性气体或蒸汽与空气形成爆炸性气体混合物的场所，适用于危险区域为1区或2区（详见GB3836.1-2000）。本产品工作级别为中级。


All the motors and electricity of QB model explosion proof crane should confirms to the prescriptions of GB3836.2-2000 'Explosion proof electrical apparatus for explosive atmosphere part 2: flame proof d', the performance of complete crane conforms to the prescription of JB/T5897-2006 "Explosion proof bridge crane". The crane is qualified inspected by inspection unit of blast-proof product which is appointed by the state with certification of conformity of an instrument for Explosive atmosphere. The sighs of explosion proof are ExdII BT4and ExdII CT4.

The product is applicable to the place in the factory where the capability of transmitting explosive is no higher than grade IIB or IIC, and where has mixture of detonating gas which is composed of flammable gas or steam whose ignition temperature team belongs to T1-T4 team, and air. The applicable danger area is Zone 1 or Zone 2 (see GB3836.1-2000) the working class is middle.


技术参数 Technical Data

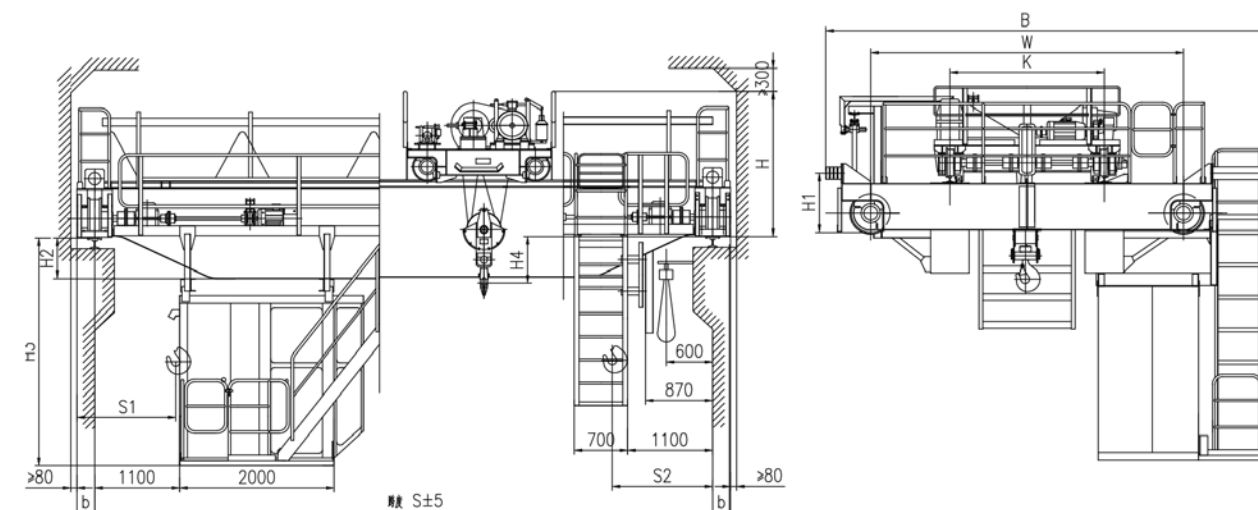


起重量 (t)	Cap	5										10									
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5				
起升高度 (m)	Lifting Height	16										16									
工作制度	Duty	A4										A4									
防爆等级	Duty	ExdII BT4 (ExdII CT4)										ExdII BT4 (ExdII CT4)									
速度 Speed (m/min)																					
起升	Hoisting	5										5									
小车运行	Crab Travelling	19.6 (14.6)										20.5 (14.6)									
大车运行	Trolley Travelling	22.3 (12)										22.3 (12)									
极限尺寸 Limt Dimenstion (mm)	S1	800										1050									
	S2	1250										1300									
主要尺寸 Main Dimensions (mm)	H	1763										1800									
	H1	765										765									
	H2	-24	126	226	376	526	676	826	976	-24	126	226	376	526	678	828	978				
	H3	2396	2546	2646	2796	2946	3096	3246	3396	2396	2546	2646	2796	2946	3098	3248	3398				
	H4	71										602					552				
	K	1400										2000									
	W	3400				3550			5000			4050					5000				
	B	5054				5204			5948			5704				5882			5948		
	b	230										230									
	最大轮压 (KN)	Max. Wheel Loading	72	78	84	92	97	109	117	124	101	108	117	122	126	135	144	150			
电机总功率 (KW)	Span	10										15.5									
荐用钢轨	Crane Rail Recommended	43kg/m																			
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V																			

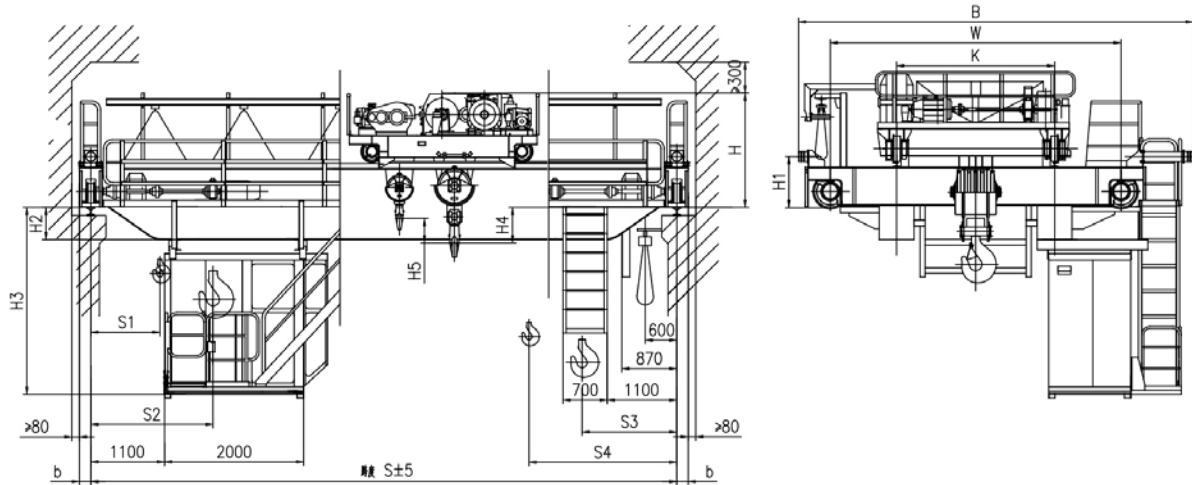

起重量-主钩 (t)	Cap-Main	16									20								
起重量-副钩 (t)	Cap-Aux.	3.2									5								
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5		
起升高度-主钩 (m)	Lifting Height-Main	16									12								
起升高度-副钩 (m)	Lifting Height-Aux.	18									14								
工作制度	Duty	A4									A4								
防爆等级	Duty	ExdIIBT4 (ExdIICT4)									ExdIIBT4 (ExdIICT4)								
速度 Speed (m/min)																			
起升-主钩	Main	4.3									4.2								
起升-副钩	Aux.	5.6									5								
小车运行	Crab Travelling	20.5 (13)									20.5 (13)								
大车运行	Trolley Travelling	19 (12.1)									19 (12.1)								
极限尺寸 Limt Dimenstion (mm)	S1	1040									1030								
	S2	1850									1930								
	S3	1500									1420								
	S4	2310									2320								
主要尺寸 Main Dimensions (mm)	H	2043									2045								
	H1	765									765								
	H2	130	130	230	380	528	678	828	978	130	130	232	382	530	680	830	980		
	H3	2550	2550	2650	2800	2948	3098	3248	3398	2550	2550	2598	2658	2808	2958	3108	3258		
	H4	860			780						858								
	H5	770									496								
	K	2000									2000								
	W	4000			4100			5000			4000			4100			5000		
	B	5864			5928			6438			5864			5928			6438		
	b	230									230								
最大轮压 (KN)	Max. Wheel Loading	138	146	152	166	173	185	197	203	160	167	176	189	197	209	220	229		
电机总功率 (KW)	Span	23.9 (23.2)									25.7 (25)								
荐用钢轨	Crane Rail Recommended	43kg/m 或 QU70																	
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V																	

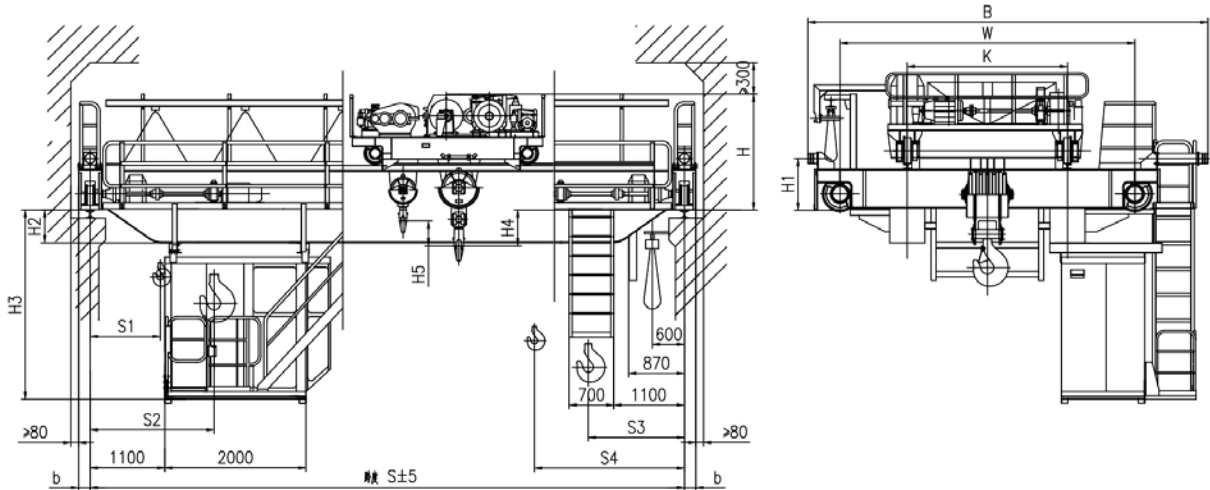

起重量-主钩 (t)	Cap-Main	32									50								
起重量-副钩 (t)	Cap-Aux.	5									10								
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5		
起升高度-主钩 (m)	Lifting Height-Main	16									12								
起升高度-副钩 (m)	Lifting Height-Aux.	18									16								
工作制度	Duty	A4									A4								
防爆等级	Duty	ExdII BT4 (ExdII CT4)									ExdII BT4 (ExdII CT4)								
速度 Speed (m/min)																			
起升-主钩	Main	4.1									3								
起升-副钩	Aux.	5									5								
小车运行	Crab Travelling	17.5 (13)									15.1 (15.1)								
大车运行	Trolley Travelling	19.1 (12.4)									17 (14.5)								
极限尺寸 Limt Dimenstion (mm)	S1	1070									1005								
	S2	2050									2200								
	S3	1700									2000								
	S4	2680									3195								
主要尺寸 Main Dimensions (mm)	H	2230									2365		2371						
	H1	815									865								
	H2	180	184	334	484	634	784	934	1034	71	246	252	402	552	702	852	952		
	H3	2508	2512	2662	2682	2832	2982	3132	3232	2339	2514	2520	2670	2820	2970	3120	3220		
	H4	800									1020			1014					
	H5	790									948								
	K	2500									2500								
	W	4650				4700			5000			4800				5000			
	B	6478				6628			6928			6828			6858			7058	
	b	230									260								
最大轮压 (KN)	Max. Wheel Loading	234	248	260	275	287	303	314	325	326	348	367	379	398	415	428	443		
电机总功率 (KW)	Span	42.2 (40.7)									50.9 (49.1)			53.9 (49.1)					
荐用钢轨	Crane Rail Recommended	QU70 或 方钢90									QU80 或 方钢100								
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V									三相交流 3-Phase A.C. 50HZ 380V								

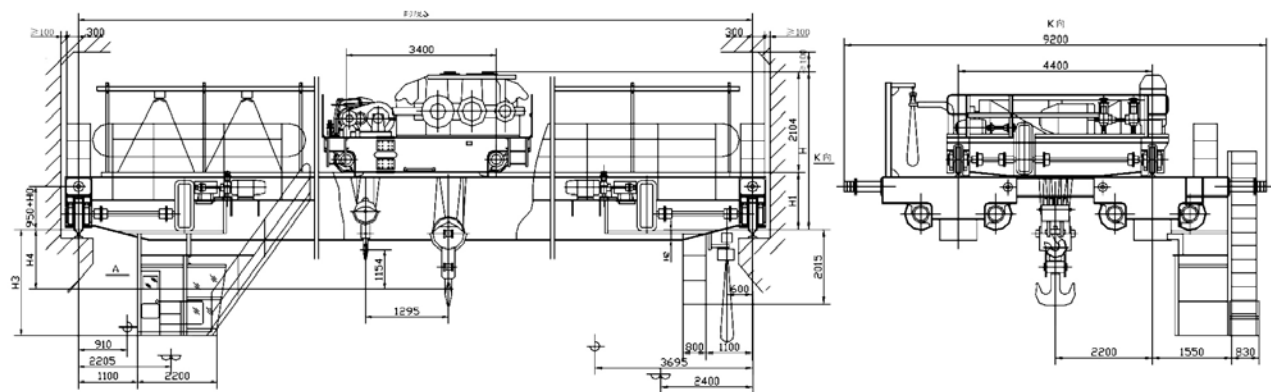

起重量 (t)	Lifting Capacity				75/20			
跨度 (m)	Span	13.5	16.5	19.5	22.5	25.5	28.5	31.5
最大起升高度 (m)	Max. Lifting Height	20/22						
工作级别	Wroking System	A4						
防爆等级	Duty	ExdII BT4; (ExdII CT4)						
速度 Speed (m/min)								
主起升	Main Lifting	1.86						
副起升	Aux Lifting	4.2						
小车运行	Crab Travelling	10						
大车运行	Trolley Travelling	15.4 (9.88)					15.7 (9.9)	
电动机 Motor (型号/kw)								
主起升	Main Lifting	YBZ 250M-8/30 (YBZE 250M-8)						
副起升	Aux Lifting	YBZ 180L-6/15 (YBZE 180L-6)						
小车运行	Trolley Travelling	YBZE 132M2-6/3.7						
大车运行	Crab Travelling	YBZE 132M2-6/3.7*2					YBZE 160M1-6/5.5*2 YBZE 132M2-6/3.7*2	
主要尺寸 Dimensions (mm)	H	3302	3302	3302	3306	3304	3308	3310
	H1	1318	1318	1318	1322	1320	1324	1326
	H2	290	440	542	546	844	844	850
	H3	2710	2860	2962	2966	3264	3268	3270
	H4	872	872	872	868	870	866	864
最大轮压 (KN)	Max. Wheel Loading	219	302	314	324	333	345	356
荐用钢轨	Steel Track	QU100						
电源	Power Supply	三相交流 50HZ 380V 3-Phase A.C. 50HZ 380V						

注: H0为大车缓冲器增加的高度

QZ型抓斗桥式起重机

QZ Model Double Girder Overhead Crane With Grab




简介 A Brief Introduction


QZ型抓斗桥式起重机广泛用于电厂，货场，车间，码头等，进行散料的装卸运输。本起重机均为重级工作制，工作级别为A6。进入司机室的走台入口方式分为：端入，侧入，顶入。额定起重量包含抓斗自重。抓斗张开方向有平行和垂直主梁两种，图示为抓斗垂直主梁张开。取物装置为双卷筒的四绳抓斗，结构简单，工作可靠，抓斗可在任意高度张开和闭合。抓斗只适用于自然堆积状态下的散粒物料，当抓取水下物料或特殊物料时须在订货时特别提出。本起重机可在室内也可在室外使用，室外使用时增加防雨罩装置。

QZ model grab overhead crane is widely used in factory, workshop and power plant to do the loading work. The work class is A6. The entrance of the cabinet is from side or top. The load capacity is including the dead weight of grab. The grab device is a four-rope grab with double drum, simple structure and reliable operation. Or other type grab according to different material. The grab can be opened and closed at any height. Grab is only suitable for bulk materials in the state of natural accumulation. When grabbing underwater materials or special materials, special request must be made when ordering. The crane can be used indoors or outdoors. The rain cover is added when used outdoors.

技术参数 Technical Data

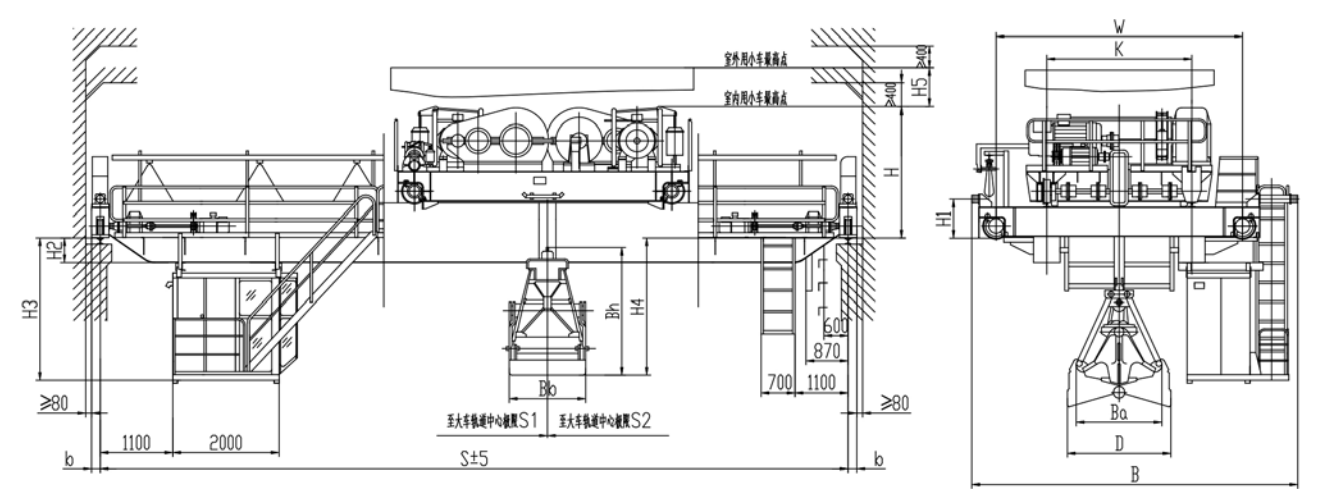

起重量 (t)	Cap	5								10							
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 (m)	Lifting Height	20								18							
工作制度	Duty	A6								A6							
速度 Speed (m/min)																	
起升	Hoisting	39.2								39.3							
小车运行	Crab Travelling	44.6								45.9							
大车运行	Trolley Travelling	93.6				113.6				112.5				101			
极限尺寸 Limt Dimenstion (mm)	S1	1635								2015							
	S2	1635								1850							
主要尺寸 Main Dimensions (mm)	B	6568			6638			7163			6913			6963		7388	7413
	W	4000			4050			5000			4000			4100		5000	
	K	2000								2000							
	H	1876				1926				2078				2168			
	H1	765				850				815				940			
	H2	128	228	328	478	628	728	878	1028	180	230	380	390	540	690	840	940
	H3	2548	2648	2748	2898	3048	3148	3298	3448	2600	2650	2800	2810	2960	3110	3260	3360
	H4	3063	3163	3263	3413	3563	3663	3813	3963	3927	3977	4127	4137	4287	4437	4587	4687
H5	850								700								
	b	230								230				260			
最大轮压 (KN)	Max. Wheel Loading	75	80	87	95	102	113	122	130	113	121	131	142	152	162	172	180
荐用钢轨	Crane Rail Recommended	荐用43kg/m 或 QU70								荐用43kg/m 或 QU70							
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V								三相交流 3-Phase A.C. 50HZ 380V							
抓斗 Grab 型号	U	113	109	110	105	106	101	102		127	123	124	119	120	115	116	
类型	Type	轻型	中型		重型		超重型			轻型	中型		重型		超重型		
容积	m³	2.5	1.5		1		0.75			5	3		2		1.5		
物料密度	t/m³	≤1	> 1-1.7		> 1.7-2.5		> 2.5-3.3			≤1	> 1-1.7		> 1.7-2.5		> 2.5-3.3		
自重	kg	2633	2549	2615	2506	2568	2479	2546		4800	4803	4866	4850	4913	4730	4793	
主要尺寸 Main Dimensions (mm)	D	3120	2740	2740	2530	2530	2340	2340		3900	3430	3430	3220	3220	2920	2920	
	Ba	2200	1950	1950	1800	1800	1650	1650		2700	2400	2400	2200	2200	1960	1960	
	Bb	1500	1354	1354	1238	1238	1160	1160		2060	1754	1754	1528	1528	1416	1416	
	Bh	3135	2935	2935	2835	2835	2735	2735		3990	3747	3747	3640	3640	3490	3490	

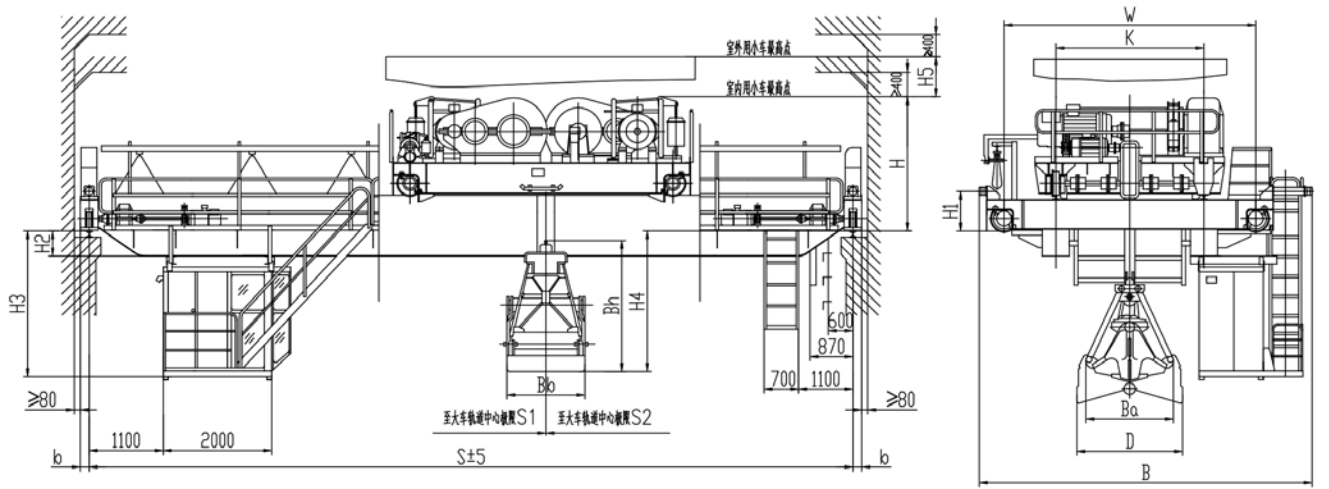

起重量 (t)	Cap	16								20							
跨度 (m)	Span	16.5	19.5	22.5	25.5	28.5	31.5	16.5	19.5	22.5	25.5	28.5	31.5				
起升高度 (m)	Lifting Height	28								26							
工作制度	Duty	A6								A6							
速度 Speed (m/min)																	
起升	Hoisting	41.8								45.7							
小车运行	Crab Travelling	43.2								43.2							
大车运行	Trolley Travelling	98	87.3							87.3							
极限尺寸 Limt Dimenstion (mm)	S1	2305								2635							
	S2	2060								2485							
主要尺寸 Main Dimensions (mm)	B	7583	7733	7833				7958				8058					
	W	4800	5000				4800				5000						
	K	2500								2500							
	H	2385	2535				2739										
	H1	940	1090				1090										
	H2	394	544	544	694	794	894	246	390	546	696	796	896				
	H3	2814	2964	2964	3114	3214	3314	2666	2816	2966	3116	3216	3316				
	H4	4999	5149	5149	5299	5399	5499	5101	5345	5501	5651	5751	5851				
H5	660								482								
b	260	300				300											
最大轮压 (KN)	Max. Wheel Loading	206	218	233	247	257	269	229	243	254	270	279	293				
荐用钢轨	Crane Rail Recommended	荐用QU70 或 方钢90*90								荐用QU70 或 方钢90*90							
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V								三相交流 3-Phase A.C. 50HZ 380V							
抓斗 Grab 型号	U	141	137	138	133	134	129	130	155	151	152	147	148	143	144		
类型	Type	轻型	中型	重型		超重型		轻型	中型	重型		超重型					
容积	m³	8	4.8	3.2		2.5		10	6	4		3					
物料密度	t/m³	≤1	> 1-1.7		> 1.7-2.5		> 2.5-3.3		≤1	> 1-1.7		> 1.7-2.5		> 2.5-3.3			
自重	kg	7840	7993	8143	8008	8159	8155	8305	9812	10098	10287	9976	10123	9780	10206		
主要尺寸 Main Dimensions (mm)	D	4380	4050	4050	3750	3750	3430	3430	5000	4500	4500	4000	4000	3800	3800		
	Ba	3200	2820	2820	2600	2600	2350	2350	3500	3200	3200	2900	2900	2400	2400		
	Bb	2350	2078	2078	1792	1792	1628	1628	2478	2288	2288	1892	1892	1892	1892		
	Bh	4775	4605	4605	4455	4455	4285	4285	5215	4955	4955	4795	4795	4695	4695		

QC型电磁桥式起重机
QC Model Double Girder Overhead Crane With Electro Magnet



简介 A Brief Introduction


QC型电磁桥式起重机广泛用于钢厂，废料场，码头等进行铁屑散料的装卸。本起重机均为重级工作制，工作级别为A6。进入司机室的走台入口方式分为：端入，侧入，顶入。

额定起重量包含电磁铁自重。起重机总重不包括电磁盘及其附件重量。


QZ model electro magnet overhead crane is widely used in steel factory to do the loading work of steel products. The entrance of the cabinet is from side or top.

The load capacity is including the dead weight of electro magnet, the dead weight of crane excludes the dead weight of the electro magnet and its accessories.


技术参数 Technical Data

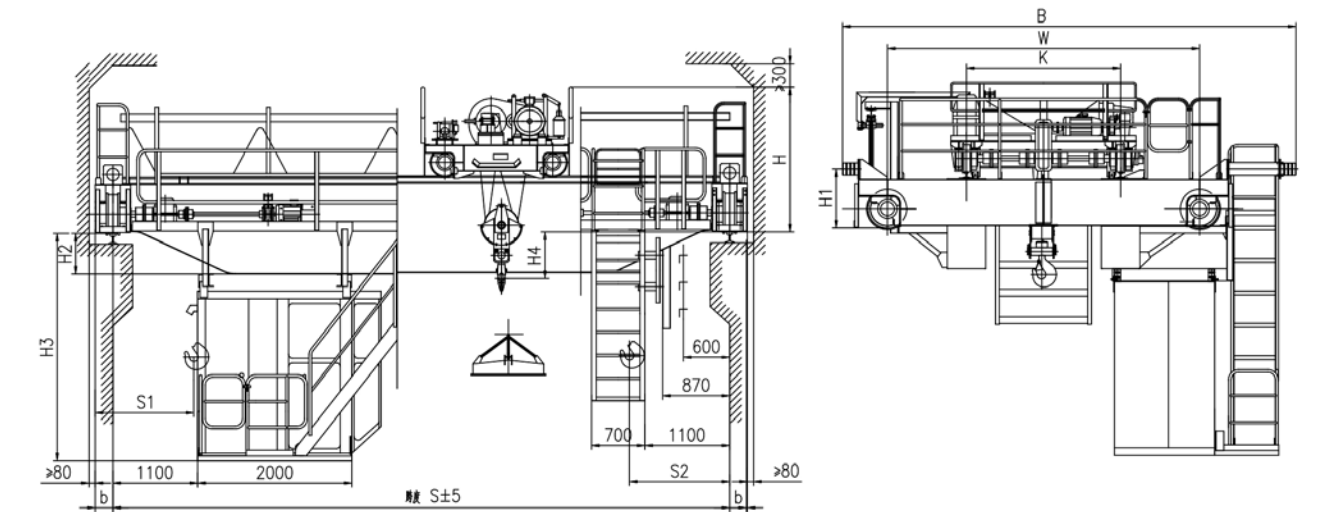

起重量 (t)	Cap	5									10									
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5			
起升高度 (m)	Lifting Height	16									16									
工作制度	Duty	A6									A6									
速度 Speed (m/min)																				
起升	Hoisting	15.5									10.4									
小车运行	Crab Travelling	37.2									39.5									
大车运行	Trolley Travelling	115.6					116.8				115.6				116.8			112.5		
极限尺寸 Limt Dimenstion (mm)	S1	1250									1500									
	S2	1500									1500									
主要尺寸 Main Dimensions (mm)	H	1765									1878						1928			
	H1	765					800				765						850			
	H2	-22	128	228	378	528	678	828	978	-22	128	228	378	528	630	780	930			
	H3	2398	2548	2648	2798	2948	3098	3248	3398	2398	2548	2648	2798	2948	3050	3200	3350			
	H4	69									600						550			
	K	1400									2000									
	W	3400				3550			5000			4050						5000		
	B	5058				5208			6028			5708				5848			6388	
	b	230									230									
最大轮压 (KN)	Max. Wheel Loading	74.5	80	86.5	94	101.5	113	121.5	128.5	104	112	121	126	134	146	155	165			
电机总功率 (KW)	Span	27.8					31.8				35.5				39.5					
荐用钢轨	Crane Rail Recommended	43kg/m									43kg/m									
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V									三相交流 3-Phase A.C. 50HZ 380V									

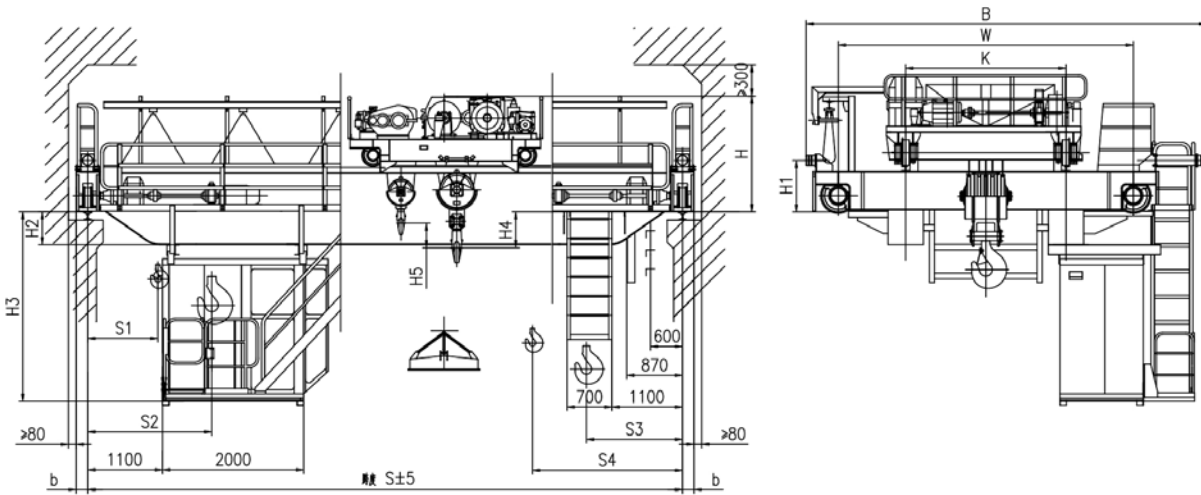

起重量-主钩 (t)	Cap-Main	16									20							
起重量-副钩 (t)	Cap-Aux.	3.2									5							
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	
起升高度-主钩 (m)	Lifting Height-Main	16									12							
起升高度-副钩 (m)	Lifting Height-Aux.	18									14							
工作制度	Duty	A6									A6							
速度 Speed (m/min)																		
起升-主起升	Main	13									9.7							
起升-副起升	Aux.	14.5									12.7							
小车运行	Crab Travelling	44.6									44.6							
大车运行	Trolley Travelling	112.5			101.4						112.5			101.4				
极限尺寸 Limit Dimenstion (mm)	S1	1040									1070							
	S2	2460									2650							
	S3	1600									1700							
	S4	3020									3280							
主要尺寸 Main Dimensions (mm)	H	2097		2099	2189	2187				2099	2101		2191					
	H1	815			940					815			940					
	H2	82	82	182	242	392	542	692	842	82	86	186	246	394	544	694	844	
	H3	2502	2502	2602	2662	2812	2962	3112	3262	2502	2506	2606	2666	2814	2964	3114	3264	
	H4	727	725		635	637				699	697		607					
	H5	768									496							
	K	2000									2000							
	W	4400						5000			4000					5000		
	B	6278				6188		6798			6278			6188		6798		
	b	230				260					230			260				
最大轮压 (KN)	Max. Wheel Loading	146	153	161	174	182	193	204	214	170	177	187	201	210	223	234	245	
电机总功率 (KW)	Span	64.5			71.5					69			76					
荐用钢轨	Crane Rail Recommended	43kg/m 或 QU70									43kg/m 或 QU70							
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V									三相交流 3-Phase A.C. 50HZ 380V							

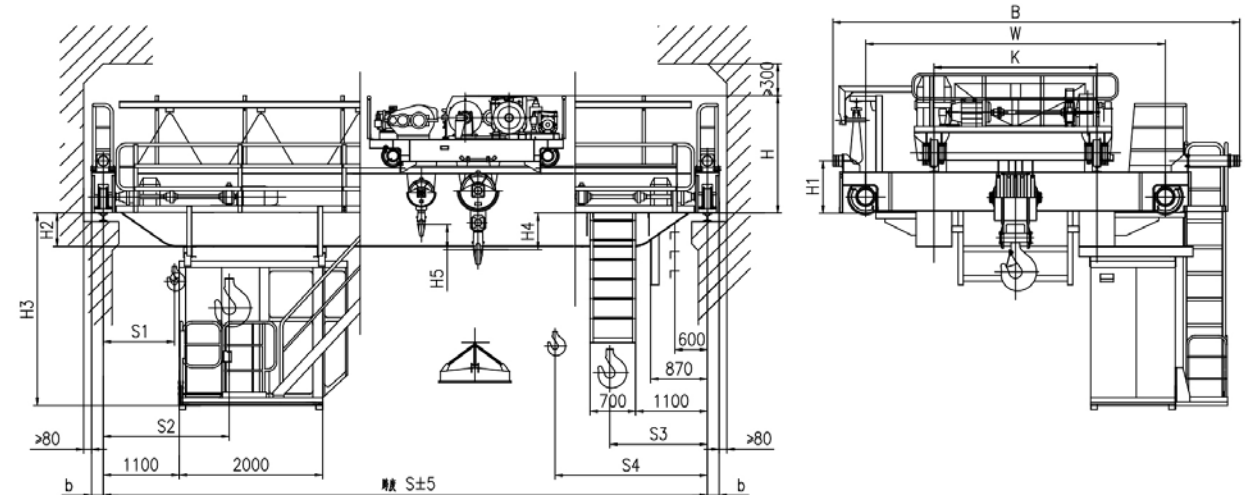

起重量-主钩 (t)	Cap-Main	32									50								
起重量-副钩 (t)	Cap-Aux.	5									10								
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5		
起升高度-主钩 (m)	Lifting Height-Main	16									12								
起升高度-副钩 (m)	Lifting Height-Aux.	18									16								
工作制度	Duty	A6									A6								
速度 Speed (m/min)																			
起升-主起升	Main	9.5									7.8								
起升-副起升	Aux.	12.7									13.2								
小车运行	Crab Travelling	42.4									38.5								
大车运行	Trolley Travelling	101.4			101.8			86.8			86.8			87.3					
极限尺寸 Limt Dimenstion (mm)	S1	1070									1005								
	S2	2650									2785								
	S3	1700									2000								
	S4	3280									3780								
主要尺寸 Main Dimensions (mm)	H	2349		2353		2483				2746	2748	2754							
	H1	905			1070					1055			1090						
	H2	92	96	246	266	416	566	716	816	71	248	254	404	554	704	804	954		
	H3	2512	2516	2666	2686	2836	2986	3136	3236	2491	2668	2674	2824	2974	3124	3224	3374		
	H4	705	701		571					1020	1018	1012							
	H5	790									948								
	K	2500									2500								
	W	4650			4700		5000			4800				5000					
	B	6588			6608		6828			6828			6858		7058				
b				260		300					300								
最大轮压 (KN)	Max. Wheel Loading	242	256	269	286	298	313	323	335	337	359	379	397	412	429	442	457		
电机总功率 (KW)	Span	96.3									131.5			139.5					
荐用钢轨	Crane Rail Recommended	QU70 或 方钢90									QU80 或 方钢100								
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V									三相交流 3-Phase A.C. 50HZ 380V								


QCL型电磁挂梁桥式起重机

QCL Model Overhead Crane With Electromagnetic Spreader Beam




简介 A Brief Introduction

1. 本起重机带有可拆卸的电磁盘，特别适用于搬运具有导磁性的黑色件数制品与材料如钢锭，型钢，生铁块等。主要用于钢铁企业轧线，成品库，船厂钢料堆场，下料车间等。
 2. 本起重机的起重量指的是吊钩以下；本起重机的自重不包含电磁铁的重量。
 3. 挂梁分为平行于主梁和垂直于主梁，以满足不同操作需求。
1. The crane is equipped with detachable electric disk, especially suitable for transporting magnetic black pieces and materials such as ingot, section steel, pig iron block, etc. It is mainly used in rolling line of iron and steel enterprises, finished products warehouse, steel yard of shipyard, cutting workshop and so on.
 2. The lifting capacity of the crane refers to the available weight under hooks; The dead weight of the crane does not include the dead weight of the electromagnet.
 3. The spreader beam is divided into parallel to the main beam and perpendicular to the main beam to meet different operational requirements.

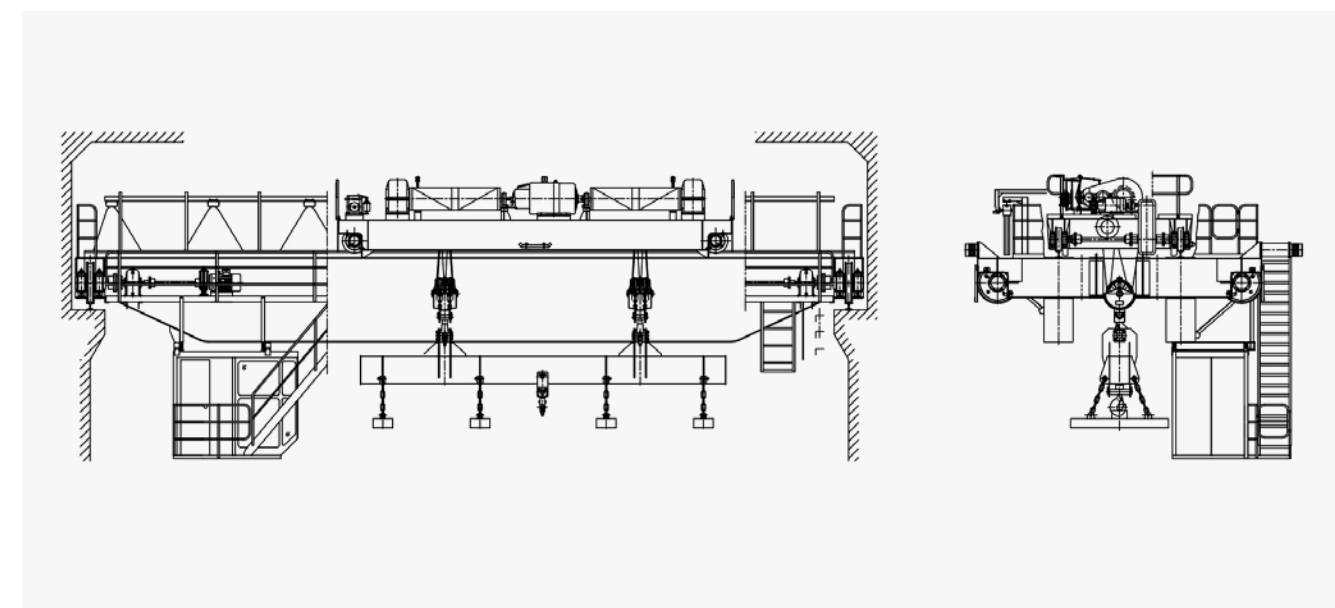


挂梁平行于主梁
The Spreader Beam Is Parallel To The Main Beam

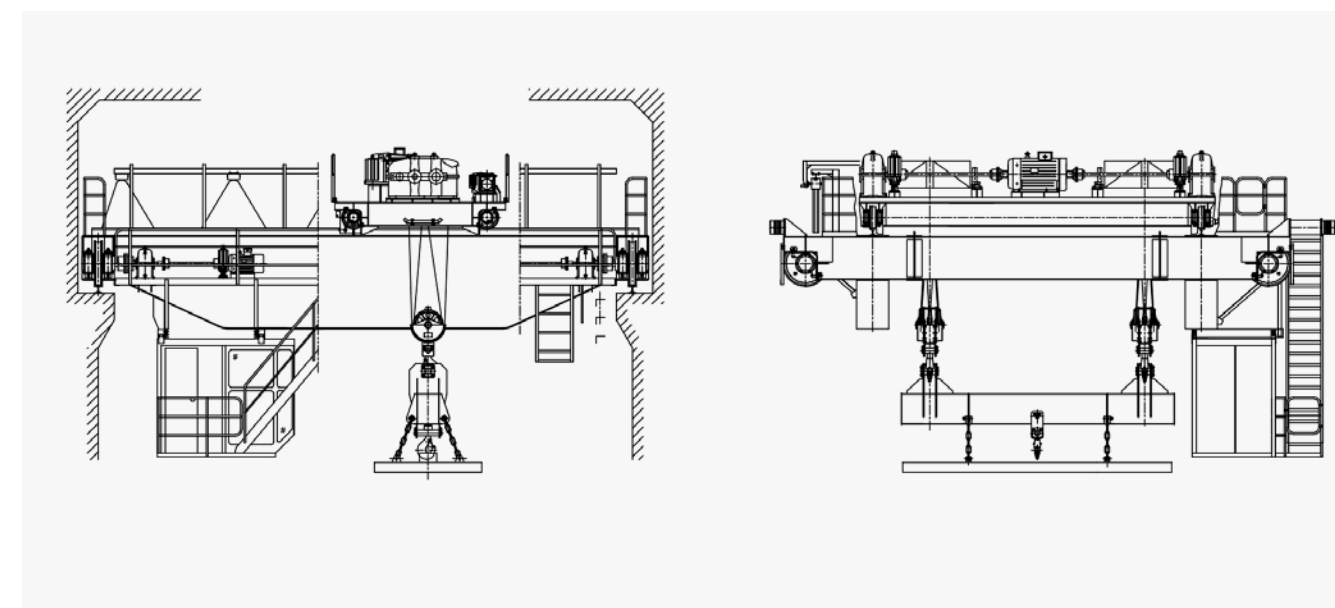

挂梁垂直于主梁
The Spreader Beam Is Perpendicular To The Main Beam

技术参数 Technical Data


15T Overhead Crane With Electromagnetic Spreader Beam (Parallel To The Main Beam)

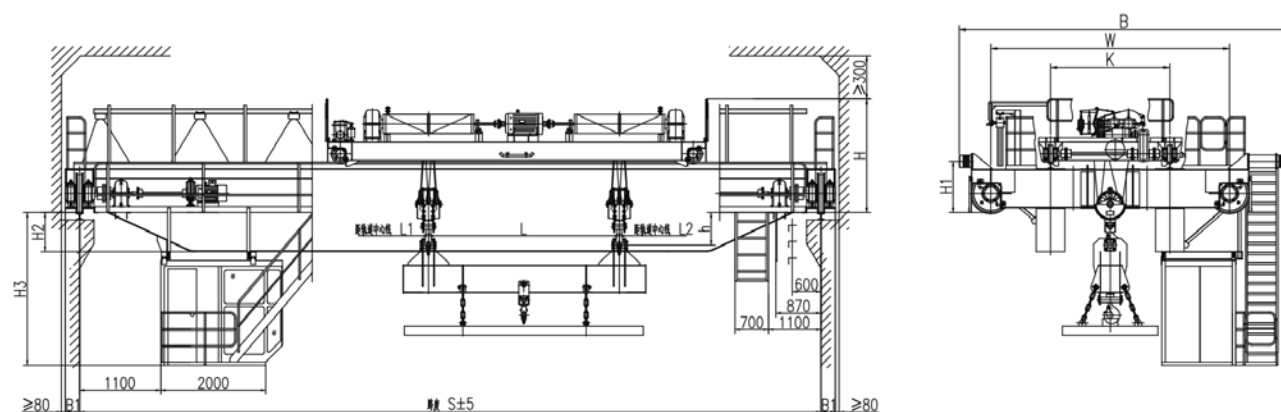

起重量 (t)	Cap	15									
跨度 (m)	Span	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	16					16				
工作制度	Duty	A6					A7				
速度 Speed (m/min)											
起升	Hoisting	13.2					15.8				
小车运行	Crab Travelling	36.7					36.6				
大车运行	Trolley Travelling	101.4					103.9				
极限尺寸 Limt Dimenstion (mm)	L	3000					4000				
	L1	2250					2250				
	L2	2000					2000				
	h	443				343	750				
主要尺寸 Main Dimensions (mm)	H	2208				2308	2290				2390
	H1	940				1040	940				1040
	H2	390	540	690	840	840	392	542	692	842	842
	H3	2810	2960	3110	3260	3260	2812	2962	3112	3262	3262
	K	2000					2500				
	W	4400	5000				4900	5500			
	B	6234	6844				6784	7394	7464		
	B1	260					260				
最大轮压 (KN)	Max. Wheel Loading	175	190	203	215	230	205	218	230	237	250
电机总功率 (KW)	Span	63					79.5				
荐用钢轨	Crane Rail Recommended	43kg/m 或 QU70									
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V									


技术参数 Technical Data

20T Overhead Crane With Electromagnetic Spreader Beam (Parallel To The Main Beam)

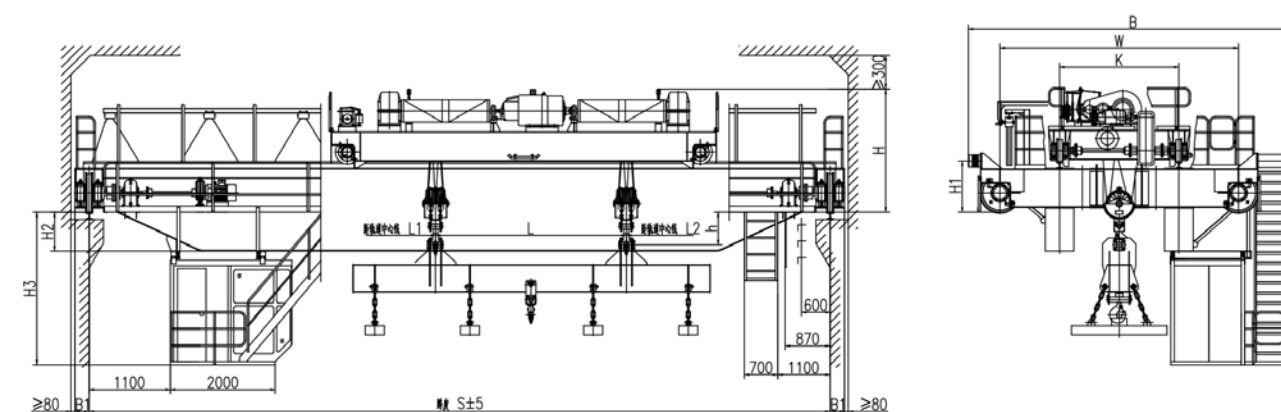


起重量 (t)	Cap	20									
跨度 (m)	Span	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	16					15				
工作制度	Duty	A6					A7				
速度 Speed (m/min)											
起升	Hoisting	12.6					15.8				
小车运行	Crab Travelling	36.2					42.8				
大车运行	Trolley Travelling	89					103.9				
极限尺寸 Limt Dimenstion (mm)	L	4000					4000				
	L1	2250					2350				
	L2	2000					2100				
	h	441				341	750				
主要尺寸 Main Dimensions (mm)	H	2310				2410	2310				2570
	H1	940				1040	940				1080
	H2	392	542	692	842	842	542	692	842	992	1042
	H3	2812	2962	3112	3262	3262	2962	3112	3262	3412	3462
	K	2500					3000				
	W	4900	5500				5400	5500			
	B	6734	7344				7354	7464			7398
	B1	260					260				
最大轮压 (KN)	Max. Wheel Loading	215	228	240	249	259	225	239	250	260	272
电机总功率 (KW)	Span	71					94.5				
荐用钢轨	Crane Rail Recommended	43kg/m 或 QU70									
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V									

32T Overhead Crane With Electromagnetic Spreader Beam (Parallel To The Main Beam)

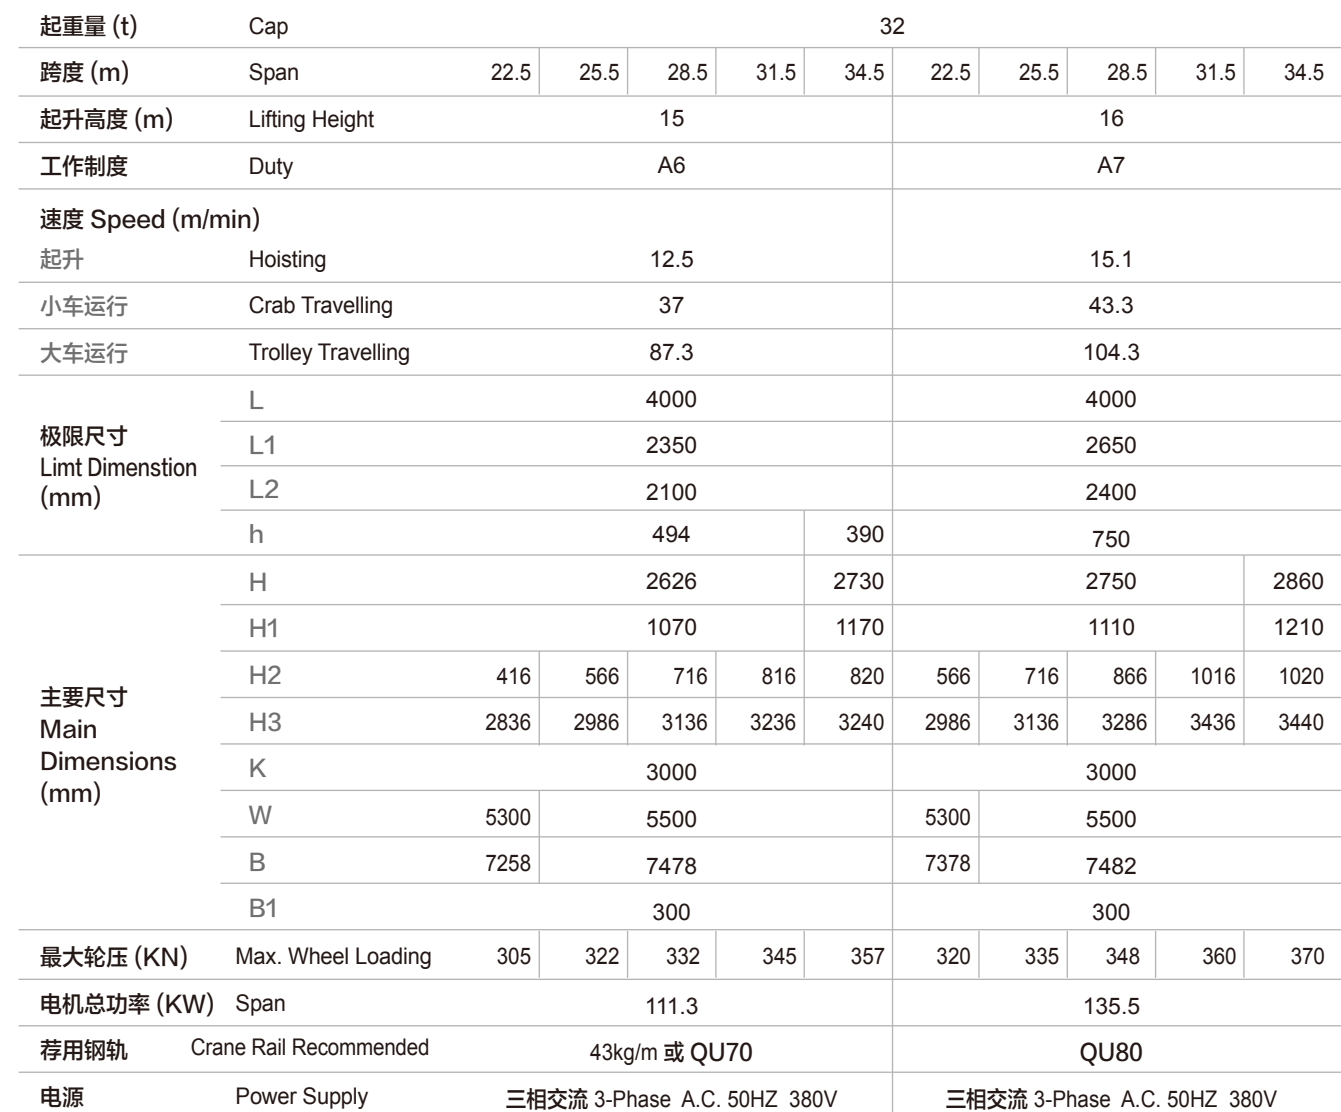


20T+20T Overhead Crane With Electromagnetic Spreader Beam (Parallel To The Main Beam)

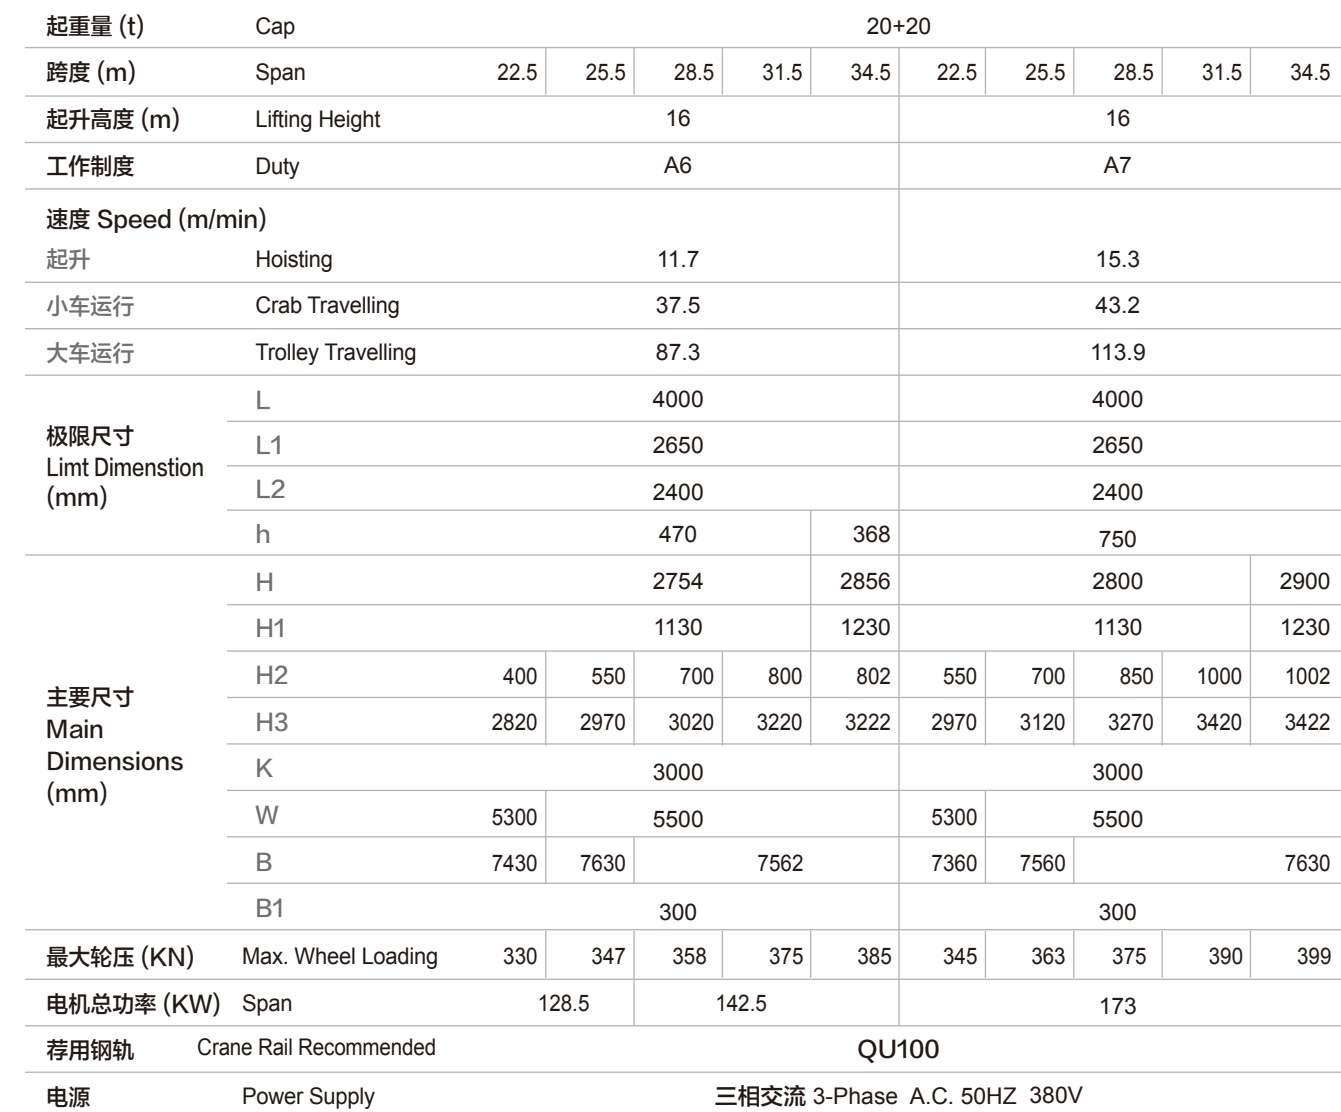

技术参数 Technical Data


7.5T+7.5T Overhead Crane With Electromagnetic Spreader Beam (Perpendicular To The Main Beam)

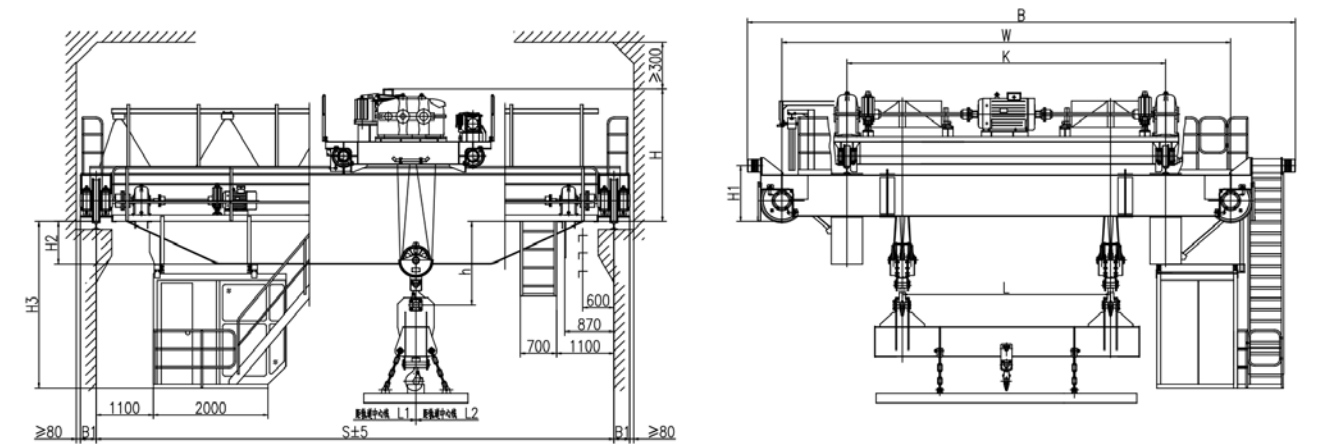

起重量 (t)	Cap	7.5+7.5									
跨度 (m)	Span	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	16					16				
工作制度	Duty	A6					A7				
速度 Speed (m/min)											
起升	Hoisting	13.2					15.8				
小车运行	Crab Travelling	36.7					36.6				
大车运行	Trolley Travelling	101.4					103.9				
极限尺寸 Limt Dimenstion (mm)	L	3000					4000				
	L1	1500					1500				
	L2	1500					1500				
	h	441				341	750				650
主要尺寸 Main Dimensions (mm)	H	2190				2290	2300				2400
	H1	940				1040	940				1040
	H2	392	542	692	842	842	394	544	694	844	844
	H3	2812	2962	3112	3262	3262	2814	2964	3114	3264	3264
	K	5000					6000				
	W	7400	8000				8400	9000			
	B	9234	9844				10284	10894	10964		
	B1	260					260				
最大轮压 (KN)	Max. Wheel Loading	190	205	217	229	244	205	219	230	237	250
电机总功率 (KW)	Span	63					79.5				
荐用钢轨	Crane Rail Recommended	43kg/m 或 QU70					43kg/m 或 QU70				
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V					三相交流 3-Phase A.C. 50HZ 380V				

技术参数 Technical Data


10T+10T Overhead Crane With Electromagnetic Spreader Beam (Perpendicular To The Main Beam)

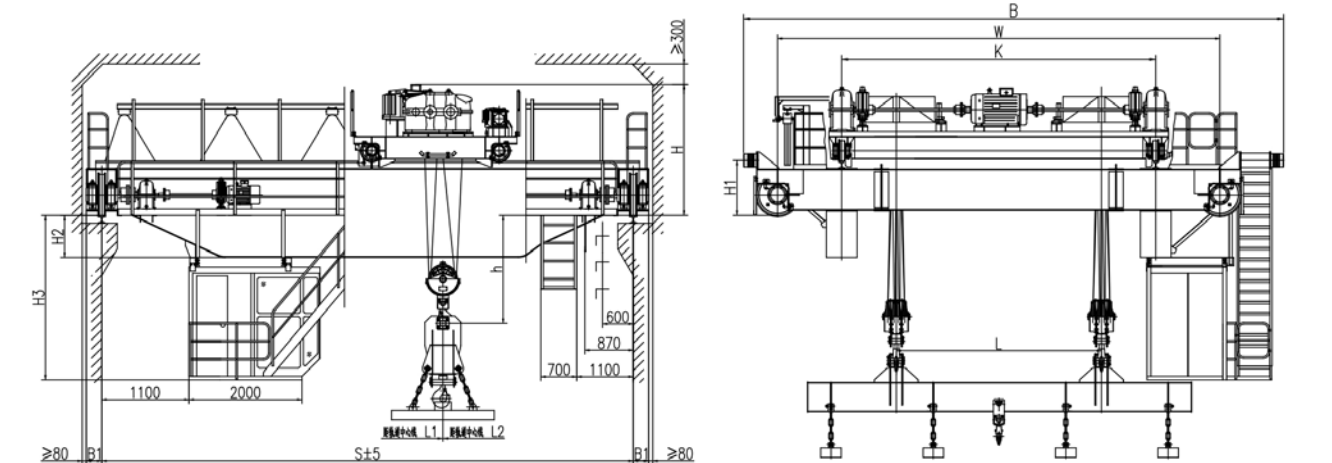

起重量 (t)	Cap	10+10									
跨度 (m)	Span	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	16					15				
工作制度	Duty	A6					A7				
速度 Speed (m/min)											
起升	Hoisting	12.6					15.8				
小车运行	Crab Travelling	36.2					42.8				
大车运行	Trolley Travelling	89					103.9				
极限尺寸 Limt Dimenstion (mm)	L	4000					4000				
	L1	1500					1700				
	L2	1500					1700				
	h	439				339	900				800
主要尺寸 Main Dimensions (mm)	H	2292				2392	2310				2570
	H1	940				1040	940				1080
	H2	394	544	694	844	844	544	694	844	994	1044
	H3	2814	2964	3114	3264	3264	2964	3114	3264	3414	3464
	K	6000					6000				
	W	8400	9000				8400	9000			
	B	10234	10844				10354	10964			
	B1	260					260				
最大轮压 (KN)	Max. Wheel Loading	225	236	251	260	270	235	247	263	271	280
电机总功率 (KW)	Span	71					94.5				
荐用钢轨	Crane Rail Recommended	43kg/m 或 QU70									
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V									

技术参数 Technical Data


16T+16T Overhead Crane With Electromagnetic Spreader Beam (Perpendicular To The Main Beam)

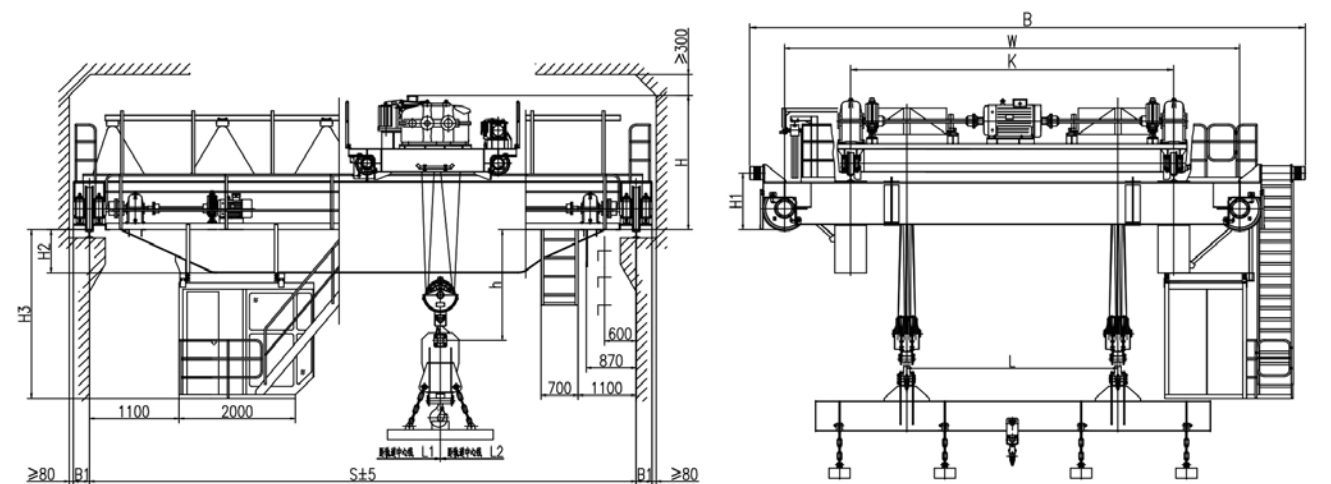

起重量 (t)	Cap	16+16									
跨度 (m)	Span	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	15					16				
工作制度	Duty	A6					A7				
速度 Speed (m/min)											
起升	Hoisting	12.5					15.1				
小车运行	Crab Travelling	37					43.3				
大车运行	Trolley Travelling	87.3					104.3				
极限尺寸 Limt Dimenstion (mm)	L	4000					4000				
	L1	1700					1700				
	L2	1700					1800				
	h	690				590	900			800	
主要尺寸 Main Dimensions (mm)	H	2540				2640	2650			2750	
	H1	1070				1170	1070			1110	
	H2	420	570	720	820	820	570	720	870	1020	1020
	H3	2840	2990	3140	3240	3240	2990	3140	3290	3440	3440
	K	6000					6500				
	W	8300	8500				8800	9000			
	B	10258	10478				10878	10982			11054
	B1	300					300				
最大轮压 (KN)	Max. Wheel Loading	315	330	343	355	365	330	345	358	370	380
电机总功率 (KW)	Span	111.3					135.5				
荐用钢轨	Crane Rail Recommended	43kg/m 或 QU70					QU80				
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V					三相交流 3-Phase A.C. 50HZ 380V				

技术参数 Technical Data

20T+20T Overhead Crane With Electromagnetic Spreader Beam (Perpendicular To The Main Beam)

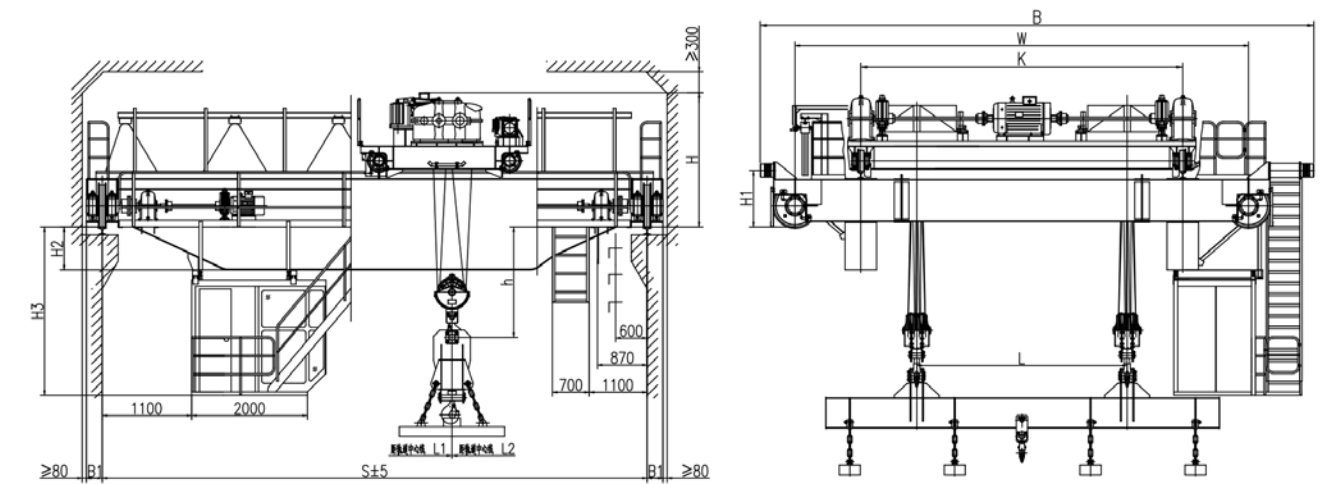

起重量 (t)	Cap	20+20									
跨度 (m)	Span	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	16					16				
工作制度	Duty	A6					A7				
速度 Speed (m/min)											
起升	Hoisting	11.7					15.3				
小车运行	Crab Travelling	37.5					43.2				
大车运行	Trolley Travelling	87.3					113.9				
极限尺寸 Limt Dimenstion (mm)	L	4000					4000				
	L1	1600					1600				
	L2	1800					1800				
	h	668				566	900			800	
主要尺寸 Main Dimensions (mm)	H	2642				2744	2750			2850	
	H1	1130				1230	1130			1230	
	H2	402	552	702	802	804	552	702	852	1002	1004
	H3	2822	2972	3022	3222	3224	2972	3122	3272	3422	3424
	K	6500					6500				
	W	8800	9000				8800	9000			
	B	10930	11130	11062			10862	11062	11132		
	B1	300					300				
最大轮压 (KN)	Max. Wheel Loading	358	375	388	405	425	373	390	403	420	440
电机总功率 (KW)	Span	128.5			142.5			173			
荐用钢轨	Crane Rail Recommended	QU100									
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V									

QL型电动旋转电磁桥式起重机

QL Model Overhead Crane With Electric Rotation Function



简介 A Brief Introduction

1. 本起重机带有可旋转功能， 适用于钢厂， 船厂， 港口， 堆场， 和仓储等室内或露天的固定跨度车间， 装卸及搬运钢板， 型钢， 盘卷等物料。特别适用于吊运不同规格且需要水平旋转的场合。挂梁为十字架结构， 可靠及安全性好， 具有一定的防摇摆功能。挂梁下可以携带电磁吸盘， 夹钳等专用吊具。

2. 旋转功能通过两种方式实现， 一种是吊钩下配有电动旋转吊具。另一种是其起升机构具有旋转小车。后者的操作效率更高。


3. 本起重机的起重量指的是吊钩以下； 本起重机的自重不包含电磁铁的重量。
1. The crane has a rotatable function, suitable for fixed span workshops in the interior or open air, such as steel mills, shipyards, ports, yards and warehouses, loading, unloading, and handling steel plates, sections, rolls and other materials. Especially suitable for lifting of different specifications and need horizontal rotation occasions. The hanging beam is a cross structure, reliable and safe, with certain anti-swaying function. Under the hanging beam can carry electromagnetic suckers, clamps and others special spreader.

2. The rotation function is realized in two ways. One is equipped with an electric rotary spreader under the hook. The other is that the lifting mechanism has a rotating trolley. The latter is more efficient.

3. The lifting capacity of the crane refers to the following hooks; The weight of the crane does not include the weight of the electromagnet.

技术参数 Technical Data


20T Overhead Crane With Rotary Lift Mechanism

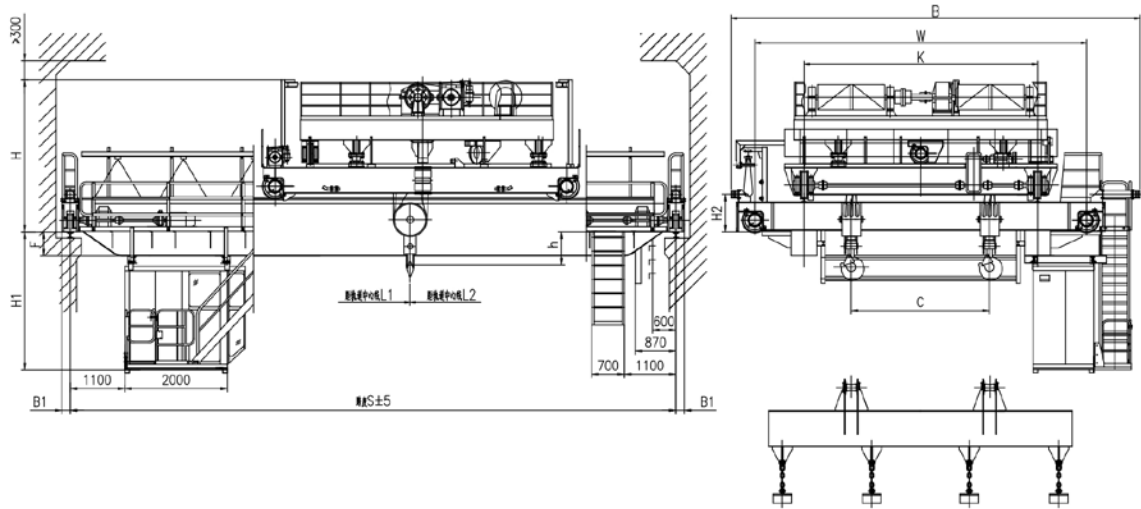

起重量 (t)	Cap	20											
跨度 (m)	Span	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	16						16					
工作制度	Duty	A6						A7					
速度 Speed (m/min)													
主钩	Main Lifting	13.4						15.8					
旋转	Turn Round	1.6 r/min						1.6 r/min					
小车运行	Crab Travelling	37						43					
大车运行	Trolley Travelling	87.3						104.3					
极限尺寸 Limt Dimenstion (mm)	L1	4000						4000					
	L2	3700						3700					
	C	3900						3900					
	h	650						650					
	H	4000				4100		4000				4100	
主要尺寸 Main Dimensions (mm)	H1	2686	2836	2986	3136	3236	3236	2786	2936	3086	3236	3336	3336
	H2	1200						1200					
	W	8200			8500			8200			8500		
	B	10108			10328			10108			10328		
	K	6000						6000					
	B1	300						300					
	F	266	416	566	716	816	816	366	516	666	816	916	916
	最大轮压 (KN)	Max. Wheel Loading	301	315	332	343	355	370	312	326	344	355	367
电机总功率 (KW)	Span	95.3						112.5					
荐用钢轨	Crane Rail Recommended	QU80											
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V											

技术参数 Technical Data


32T Overhead Crane With Rotary Lift Mechanism

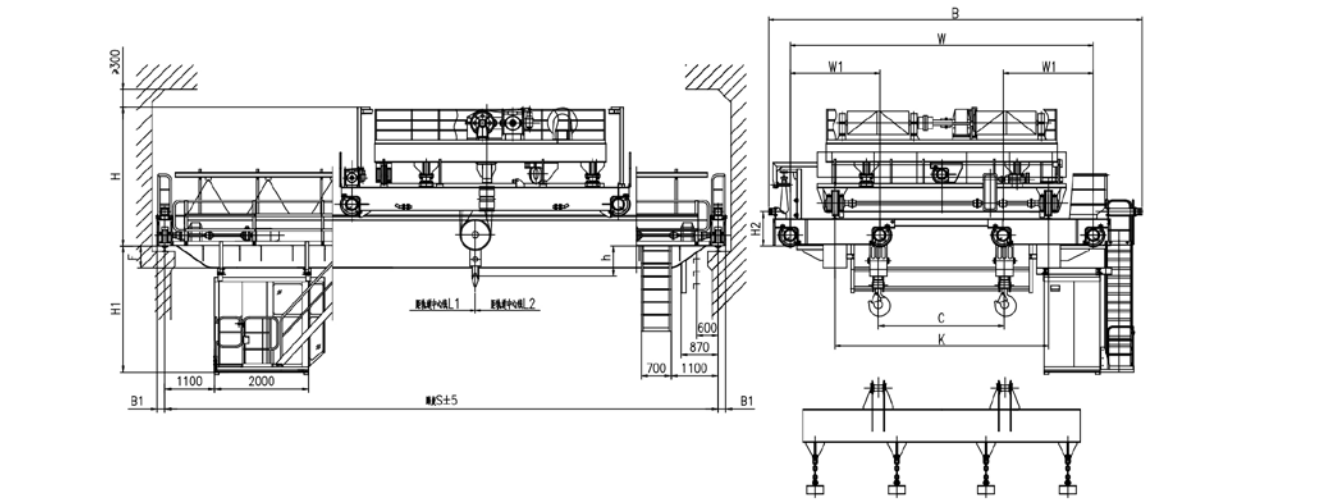

起重量 (t)	Cap	32											
跨度 (m)	Span	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	16						16					
工作制度	Duty	A6						A7					
速度 Speed (m/min)													
主钩	Main Lifting	12.8						15					
旋转	Turn Round	1.64 r/min						1.64 r/min					
小车运行	Crab Travelling	32						43					
大车运行	Trolley Travelling	90.8						106.4					
极限尺寸 Limt Dimenstion (mm)	L1	4100						4150					
	L2	3800						3800					
	C	3800						3800					
	h	750						750					
主要尺寸 Main Dimensions (mm)	H	4250					4350	4400					4500
	H1	2672	2822	2972	3122	3224	3224	2772	2922	3072	3222	3324	3324
	H2	1200						1200					
	W	8300			8500			8300			8500		
	W1	2300			2500			2300			2500		
	B	10358			10558			10358			10558		
	K	6000						6000					
	B1	300						300					
	F	252	402	552	702	804	804	352	502	652	802	904	904
最大轮压 (KN)	Max. Wheel Loading	201	210	220	232	240	252	208	219	230	243	255	266
电机总功率 (KW)	Span	134.3						159.3					
荐用钢轨	Crane Rail Recommended	QU80											
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V											

技术参数 Technical Data


40T Overhead Crane With Rotary Lift Mechanism

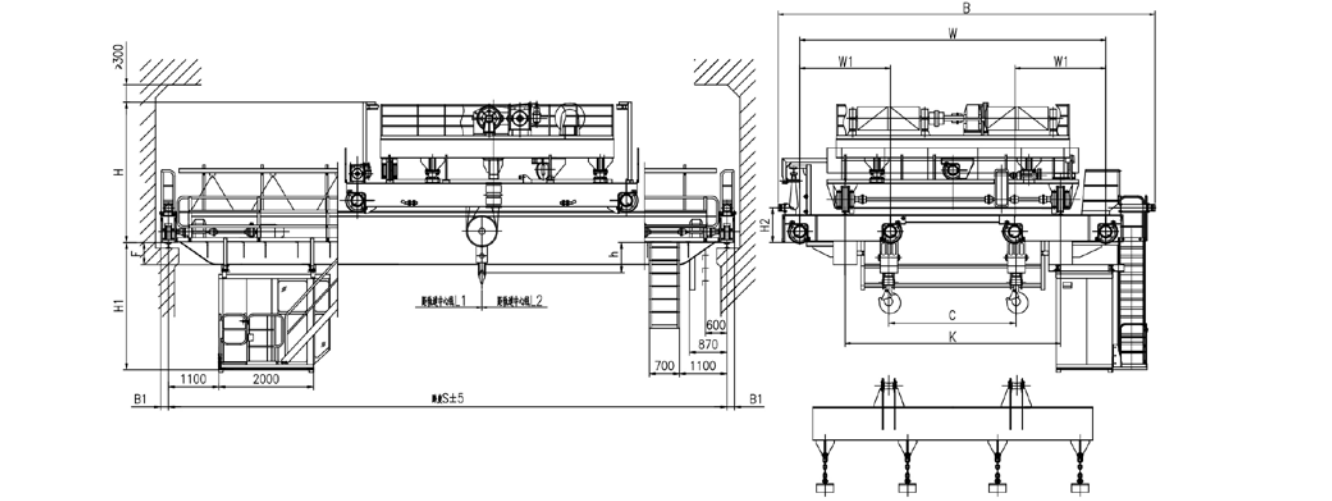

起重量 (t)	Cap	40											
跨度 (m)	Span	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	16						16					
工作制度	Duty	A6						A7					
速度 Speed (m/min)													
主钩	Main Lifting	12						15					
旋转	Turn Round	1.56 r/min						1.64 r/min					
小车运行	Crab Travelling	33.5						43					
大车运行	Trolley Travelling	90.8						106.4					
极限尺寸 Limt Dimenstion (mm)	L1	4150						4150					
	L2	3850						3850					
	C	3800						3800					
	h	850						850					
主要尺寸 Main Dimensions (mm)	H	4550					4650	4670					4770
	H1	2724	2874	3024	3174	3324	3324	2824	2974	3124	3274	3424	3424
	H2	1200						1200					
	W	8300			8500			8300			8500		
	W1	2300			2500			2300			2500		
	B	10358			10558			10358			10558		
	K	6000						6000					
	B1	300						300					
	F	304	454	604	754	904	904	404	554	704	854	1004	1004
最大轮压 (KN)	Max. Wheel Loading	228	240	255	265	275	288	239	250	267	273	290	303
电机总功率 (KW)	Span	149.3						183.3					
荐用钢轨	Crane Rail Recommended	QU80											
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V											

技术参数 Technical Data


20T Overhead Crane With Rotary Electromagnetic Spreader Beam

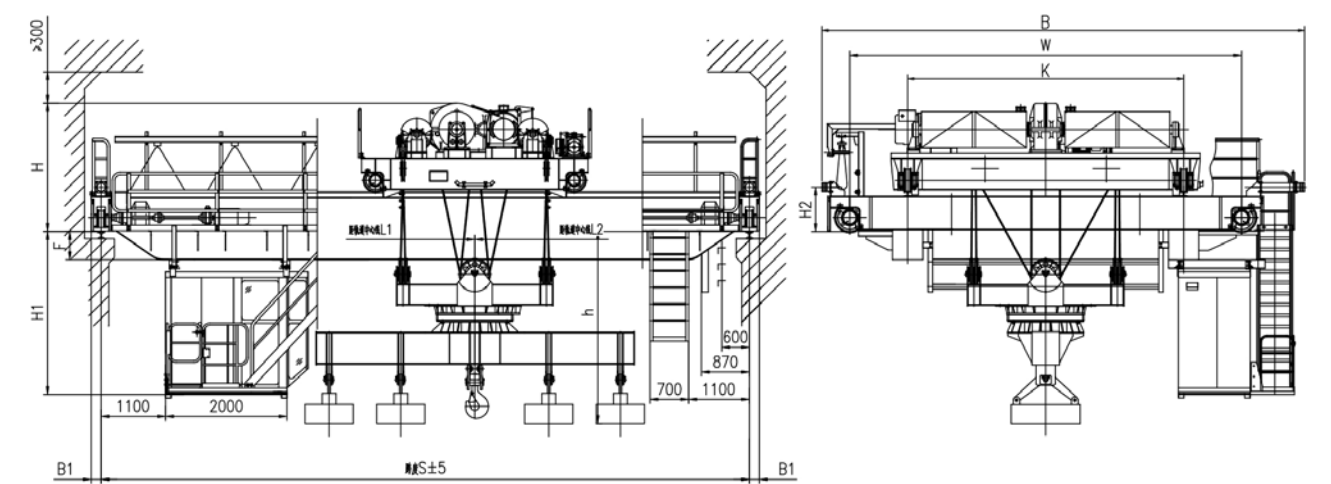

起重量 (t)	Cap	20											
跨度 (m)	Span	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	16						16					
工作制度	Duty	A6						A7					
速度 Speed (m/min)													
主钩	Main Lifting	13.4						14.7					
旋转	Turn Round	1.2 r/min						1.2 r/min					
小车运行	Crab Travelling	37						43					
大车运行	Trolley Travelling	87.3						104.3					
极限尺寸 Limt Dimenstion (mm)	L1	2200						2200					
	L2	2500						2500					
	h	3400						3400					
主要尺寸 Main Dimensions (mm)	H	2700					2800	2800					2900
	H1	2686	2836	2986	3136	3236	3236	2786	2936	3086	3236	3336	3336
	H2	1200						1200					
	W	7700			8000			7700			8000		
	B	9608			9828			9608			9828		
	K	5500						5500					
	B1	300						300					
	F	266	416	566	716	816	816	366	516	666	816	916	916
最大轮压 (KN)	Max. Wheel Loading	232	245	265	280	295	312	243	257	278	293	309	328
电机总功率 (KW)	Span	113.5						122.7					
荐用钢轨	Crane Rail Recommended	QU80											
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V											

技术参数 Technical Data


25T Overhead Crane With Rotary Electromagnetic Spreader Beam

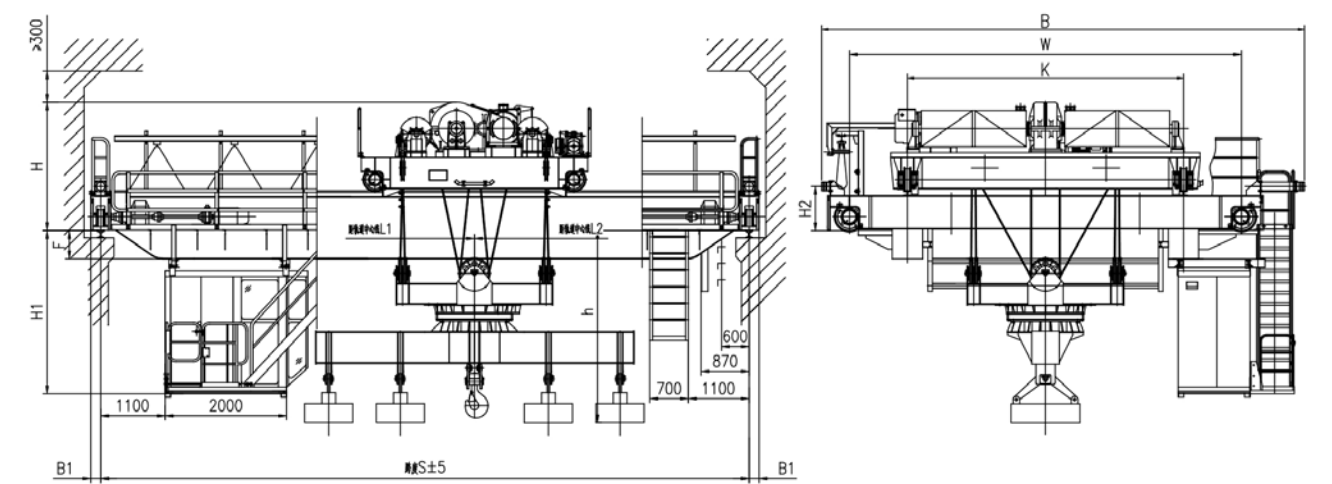

起重量 (t)	Cap	25											
跨度 (m)	Span	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	16						16					
工作制度	Duty	A6						A7					
速度 Speed (m/min)													
主钩	Main Lifting	11.8						14.7					
旋转	Turn Round	1.2 r/min						1.2 r/min					
小车运行	Crab Travelling	37						43					
大车运行	Trolley Travelling	87.3						104.3					
极限尺寸 Limt Dimenstion (mm)	L1	2200						2200					
	L2	2500						2500					
	h	3400						3400					
主要尺寸 Main Dimensions (mm)	H	2750					2854	2850					2950
	H1	2690	2840	2990	3140	3240	3240	2790	2940	3090	3240	3340	3340
	H2	1200						1200					
	W	7700			8000			7700			8000		
	B	9608			9828			9608			9828		
	K	5500						5500					
	B1	300						300					
	F	270	420	570	720	820	820	370	520	670	820	920	920
最大轮压 (KN)	Max. Wheel Loading	272	285	295	305	325	344	286	297	308	319	340	362
电机总功率 (KW)	Span	114.3						122.7					
荐用钢轨	Crane Rail Recommended	QU80											
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V											

技术参数 Technical Data


32T Overhead Crane With Rotary Electromagnetic Spreader Beam

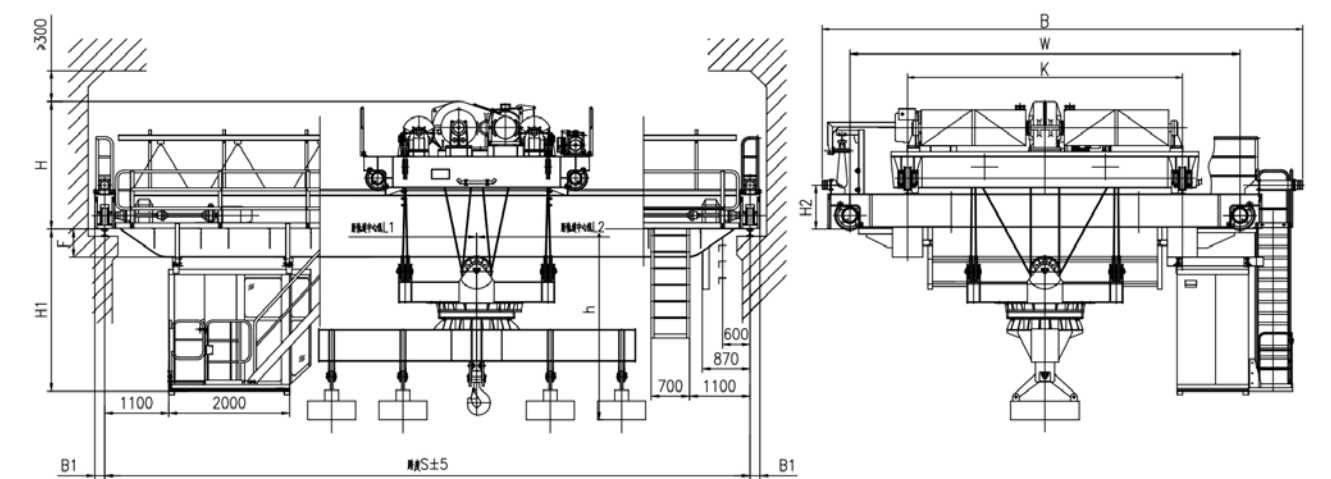

起重量 (t)	Cap	32											
跨度 (m)	Span	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	16						16					
工作制度	Duty	A6						A7					
速度 Speed (m/min)													
主钩	Main Lifting	10.6						13.4					
旋转	Turn Round	1.3 r/min						1.3 r/min					
小车运行	Crab Travelling	38.5						43.1					
大车运行	Trolley Travelling	103.8						113.9					
极限尺寸 Limt Dimenstion (mm)	L1	2400						2400					
	L2	2700						2700					
	h	3800						3800					
主要尺寸 Main Dimensions (mm)	H	2910					3010	3040					3140
	H1	2674	2824	2974	3124	3224	3224	2774	2924	3074	3224	3324	3324
	H2	1200						1200					
	W	7800			8000			7700			8000		
	B	9858			10058			9608			9828		
	K	5500						5500					
	B1	300						300					
	F	254	404	554	704	804	804	354	504	654	804	904	904
最大轮压 (KN)	Max. Wheel Loading	328	340	355	365	385	407	344	358	373	384	405	425
电机总功率 (KW)	Span	148						178.5					
荐用钢轨	Crane Rail Recommended	QU80											
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V											

技术参数 Technical Data

40T Overhead Crane With Rotary Electromagnetic Spreader Beam

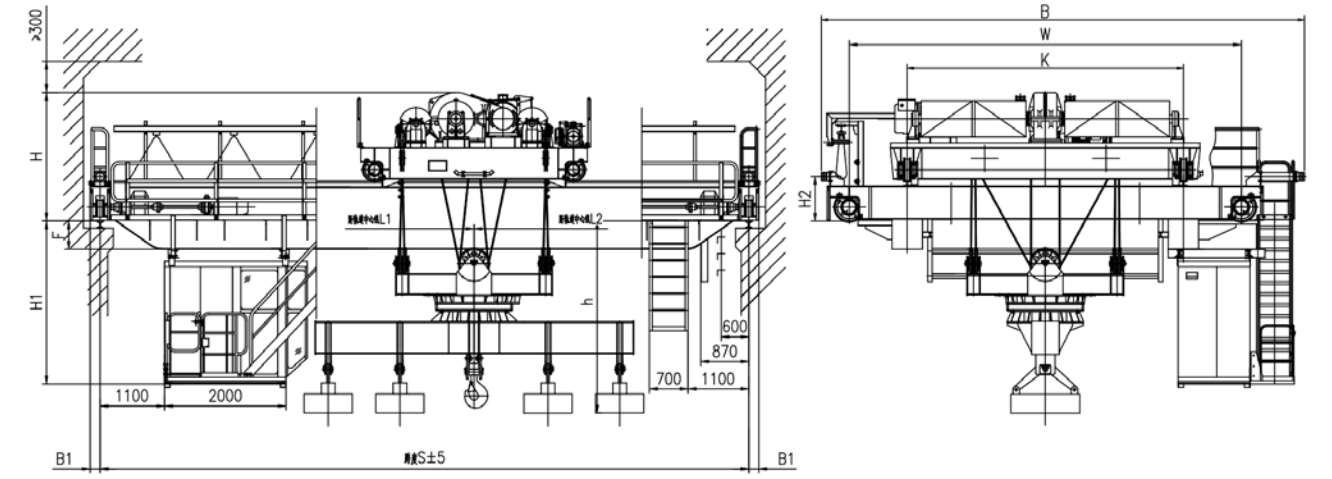

起重量 (t)	Cap	40											
跨度 (m)	Span	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 (m)	Lifting Height	16						16					
工作制度	Duty	A6						A7					
速度 Speed (m/min)													
主钩	Main Lifting	10.5						13.4					
旋转	Turn Round	1.3 r/min						1.3 r/min					
小车运行	Crab Travelling	37.5						43.1					
大车运行	Trolley Travelling	103.8						106.4					
极限尺寸 Limt Dimenstion (mm)	L1	2500						2500					
	L2	2800						2850					
	h	4000						4000					
主要尺寸 Main Dimensions (mm)	H	3020					3120	3209					3309
	H1	2674	2924	3074	3224	3324	3224	2774	3024	3174	3324	3424	3424
	H2	1200						1200					
	W	7800			8000			7800			8000		
	B	9858			10058			9858			10058		
	K	5500						5500					
	B1	300						300					
	F	254	504	654	804	904	904	354	604	754	904	1004	1004
最大轮压 (KN)	Max. Wheel Loading	366	385	405	413	430	448	390	406	425	434	449	470
电机总功率 (KW)	Span	170						205.5					
荐用钢轨	Crane Rail Recommended	QU80						QU100					
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V						三相交流 3-Phase A.C. 50HZ 380V					


QDY/YZ 型铸造冶金桥式起重机
QDY/YZ Model Overhead Crane For Casting, Foundry And Metallurgy



简介 A Brief Introduction

铸造起重机是炼钢连铸工艺中的主要设备，主要用于吊运和转运液态钢包。
有以下功能供用户选配：可旋转吊具； 龙门钩钩距可变； 载荷的称重及显示。
Casting crane is the main equipment in steelmaking and continuous casting process, which is mainly used for lifting and transferring liquid ladle
The following functions are optional for users: Rotatable spreader; The distance of gantry hooks is variable; Load weighing and display.


技术参数 Technical Data
5-10t QDY Model Metallurgical Crane

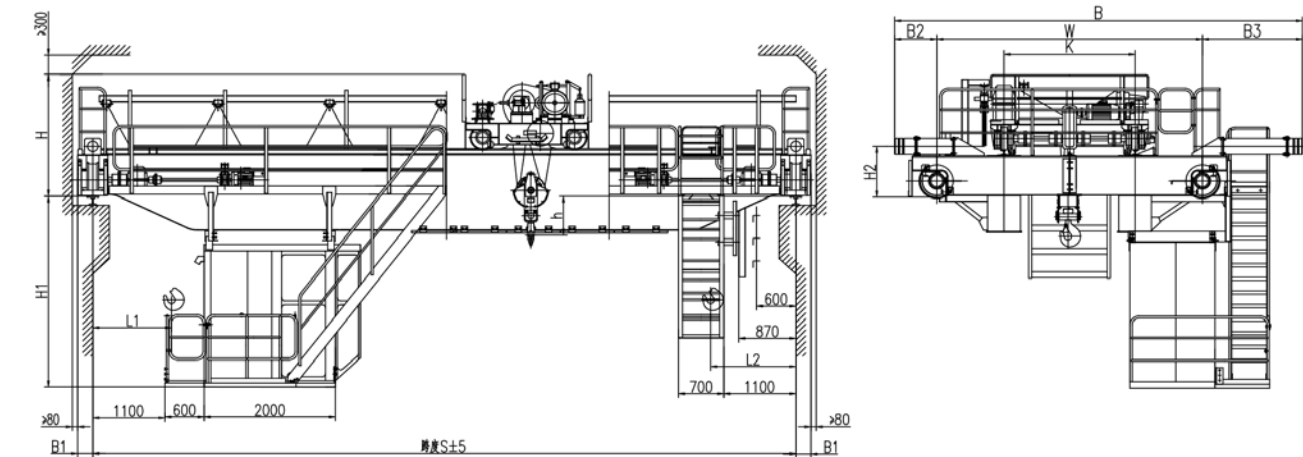

起重量 (t)	Lifting Capacity	5										10							
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5		
起升高度 (m)	Lifting Height	16										20							
工作制度	Duty	A7										A7							
速度 Speed (m/min)																			
起升	Hoisting	12.9										13							
小车运行	Crab Travelling	39.5										35.2							
大车运行	Trolley Travelling	93.7				95.2						95.2						88.3	
极限尺寸 Limt Dimenstion (mm)	L	1600										1600							
	L2	1250										1300							
	h	71										602						552	
	H	1763										1876						1926	
主要尺寸 Main Dimensions (mm)	H1	2598	2648	2748	2898	2948	3098	3248	3398	2598	2648	2748	2898	2948	3048	3198	3348		
	H2	800+H0						800+H0		800+H0						850+H0			
	B	5158				5308		6268		5808				6048		6628			
	K	1400										2000							
	W	3400				3550		5000		4050						5000			
	B1	230										230							
	B2	514						634		514				634					
	B3	1244						634		1244				1364		994			
	最大轮压 (KN)	Max. Wheel Loading	80	87	92	101	107	123	134	143	112	120	129	138	145	160	171	181	
	电机总功率 (KW)	Span	24.5				27.1					40.1						45.5	
荐用钢轨	Crane Rail Recommended	43kg/m										43kg/m							
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V										三相交流 3-Phase A.C. 50HZ 380V							

技术参数 Technical Data


16/3.2T-20/5T QDY Model Metallurgical Crane

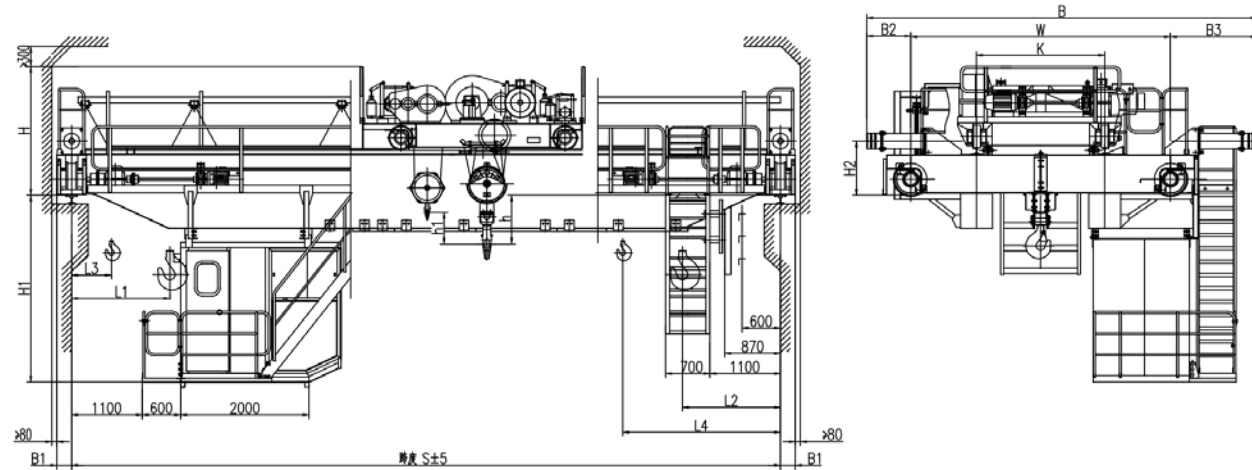

起重量 (t)	Lifting Capacity	16/32										20/5							
跨度 (m)	Span	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5		
起升高度-主钩 (m)	Lifting Height-Main	16									12								
起升高度-副钩 (m)	Lifting Height-Aux.t	18									14								
工作制度	Duty	A7									A7								
速度 Speed (m/min)																			
主钩	Main	10.9									9.8								
副钩	Aux.	11.5									12.75								
小车运行	Crab Travelling	31									37								
大车运行	Trolley Travelling	87.8			90.4						88.3			90.9					
极限尺寸 Limit Dimension (mm)	L1	1930									1980								
	L2	1530									1530								
	L3	1070									1050								
	L4	2390									2460								
	h	729		727		637		639			701		699		609				
	h1	770									496								
主要尺寸 Main Dimensions (mm)	H	2095		2097		2187		2185			2097		2099		2185				
	H1	2600	2600	2700	2760	2910	3060	3210	3360	2600	2602	2702	2764	2912	3062	3212	3362		
	H2	850+H0				940+H0					850+H0			940+H0					
	B	6278				6428		7038			6278			6428		7038			
	K	2000									2000								
	W	4400				5000			4400				5000						
	B1	230				260					230			260					
	B2	614				684		689			614			684		689			
	B3	1264				1344		1349			1264			1344		1349			
最大轮压 (KN)	Max. Wheel Loading	152	159	168	182	190	204	216	229	176	183	193	207	216	231	242	253		
电机总功率 (KW)	Span	54.3				59.7					71.7			79.7					
荐用钢轨	Crane Rail Recommended	43kg/m or QU70									43kg/m or QU70								
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V									三相交流 3-Phase A.C. 50HZ 380V								

技术参数 Technical Data


32/5T-50/10T QDY Model Metallurgical Crane

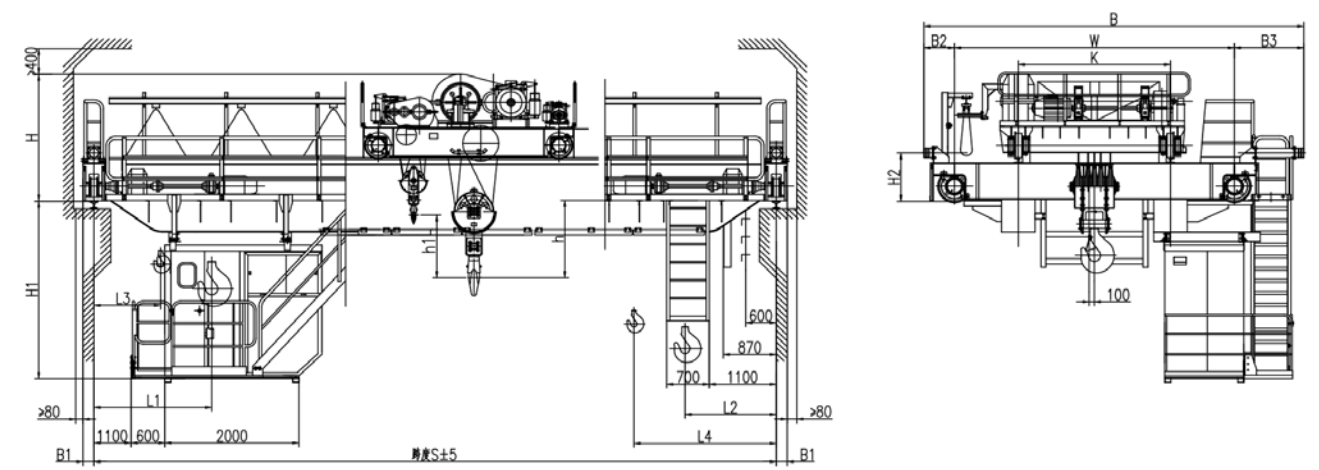

起重量 (t)	Lifting Capacity	32/5								50/10							
跨度 (m)	Span	13.5	16.5	19.5	22.5	25.5	28.5	31.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5		
起升高度-主钩 (m)	Lifting Height-Main	16								12							
起升高度-副钩 (m)	Lifting Height-Aux.t	18								16							
工作制度	Duty	A7								A7							
速度 Speed (m/min)																	
主钩	Main	7.7								6.3							
副钩	Aux.	12.75								10.5							
小车运行	Crab Travelling	37.6								31.8							
大车运行	Trolley Travelling	90.9	77							77	77.8						
极限尺寸 Limit Dimension (mm)	L1	2050								2200							
	L2	1700								2000							
	L3	1070								1005							
	L4	2680								3195							
	h	701	571							1018	1012						
	h1	790								948							
主要尺寸 Main Dimensions (mm)	H	2351	2451	2481						2750	2754						
	H1	2666	2816	2834	3034	3184	3334	3434	2616	2672	2822	3022	3172	3322	3422		
	H2	940+H0			1070+H0					1090+H0							
	B	6588			6848			7068			6828		6998		7198		
	K	2500								2500							
	W	4650			4700			5000			4800				5000		
	B1	260			300					300							
	B2	664			734					714		784					
	B3	1274			1414			1334			1314		1414				
最大轮压 (KN)	Max. Wheel Loading	262	277	296	310	327	339	354	365	388	409	426	445	460	481		
电机总功率 (KW)	Span	90.5								118.5		130.5					
荐用钢轨	Crane Rail Recommended	QU70 或 方钢90								QU80 或 方钢100							
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V								三相交流 3-Phase A.C. 50HZ 380V							

技术参数 Technical Data


74/20T QDY Model Metallurgical Crane

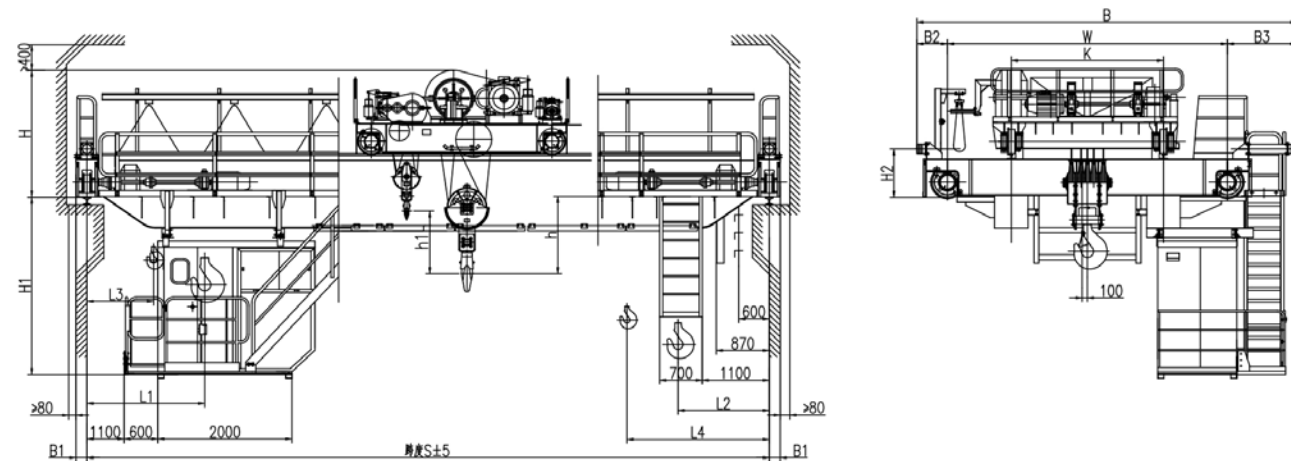

起重量 (t)	Lifting Capacity	74/20						
跨度 (m)	Span	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度-主钩 (m)	Lifting Height-Main	20						
起升高度-副钩 (m)	Lifting Height-Aux.t	22						
工作制度	Duty	A7						
速度 Speed (m/min)								
主钩	Main	6.4						
副钩	Aux.	9.7						
小车运行	Crab Travelling	37.2						
大车运行	Trolley Travelling	67.4			77			
极限尺寸 Limt Dimenstion (mm)	L1	2400						
	L2	2750						
	L3	1050						
	L4	4100						
	h	1330	1328	1324	1320	1318	1318	1316
主要尺寸 Main Dimensions (mm)	h1	1240						
	H	3521	3523	3525	3531	3531	3531	3533
	H1	2910	3062	3064	3070	3070	3372	3472
	H2	950+H0			1380+H0			
	B	8828						
	K	4400						
	B1	310						
最大轮压 (KN)	Max. Wheel Loading	278	292	304	318	330	340	351
电机总功率 (KW)	Span	200			214			
荐用钢轨	Crane Rail Recommended	QU100						
电源	Power Supply	三相交流 3-Phase A.C. 50HZ 380V						

技术参数 Technical Data


100/32T-125/32T YZ Model Casting Crane

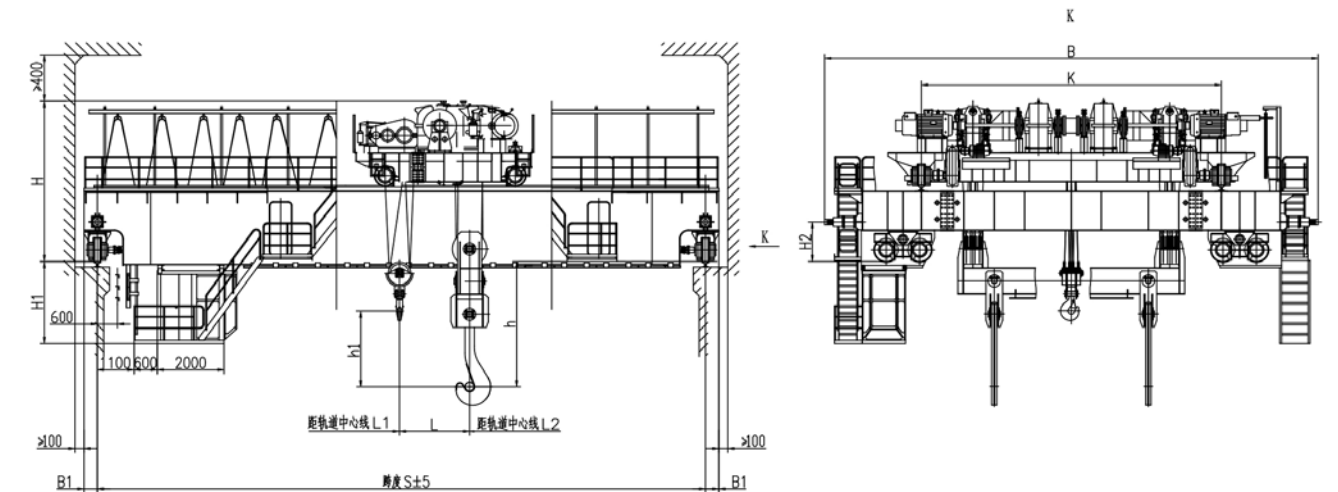

起重量-主钩 (t)	Cap-Main	100				125			
起重量-副钩 (t)	Cap-Aux.	32				32			
跨度 (m)	Span	19.5	22.5	25.5	28.5	19.5	22.5	25.5	28.5
起升高度-主钩 (m)	Lifting Height-Main	20				20			
起升高度-副钩 (m)	Lifting Height-Aux.	22				22			
工作制度	Duty	A7				A7			
速度 Speed (m/min)									
起升-主钩	Main	7.5				7.5			
起升-副钩	Aux.	10.5				10.5			
小车运行	Crab Travelling	38				38			
大车运行	Trolley Travelling	68				79.7			
极限尺寸 Limt Dimenstion (mm)	L1	1600				1600			
	L2	2200				2200			
	L	2500				2450			
	h	3997				4097			
	h1	2300				2300			
主要尺寸 Main Dimensions (mm)	H	4900				5150			
	H1	2687				2687			
	B	14500				14900			
	K	9200				9600			
	B1	410				410			
最大轮压 (KN)	Max. Wheel Loading	486	516	540	560	605	618	632	343
电机总功率 (KW)	Span	393				479			
荐用钢轨	Crane Rail Recommended	QU120				QU120			
电源	Power Supply	380v / 50hz / 3ph AC				380v / 50hz / 3ph AC			

技术参数 Technical Data


140/40T YZ Model Casting Crane

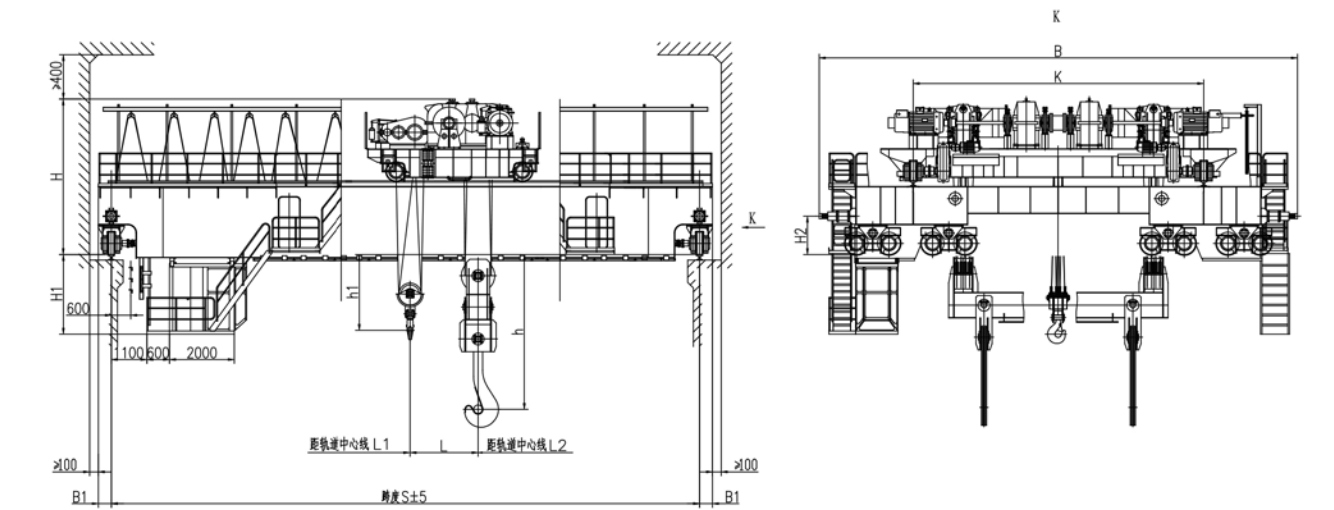

起重量-主钩 (t)	Cap-Main	140		
起重量-副钩 (t)	Cap-Aux.	40		
跨度 (m)	Span	22	25	28
起升高度-主钩 (m)	Lifting Height-Main	22		
起升高度-副钩 (m)	Lifting Height-Aux.	22		
工作制度	Duty	A7		
速度 Speed (m/min)				
起升-主钩	Main	6.84		
起升-副钩	Aux.	9.1		
小车运行	Crab Travelling	38		
大车运行	Trolley Travelling	73		
极限尺寸 Limt Dimenstion (mm)	L1	1500		
	L2	2000		
	L	2500		
	h	4200		
	h1	300		
主要尺寸 Main Dimensions (mm)	H	5200		
	H1	2600	200	
	B	17000		
	K	11000		
	B1	500		
最大轮压 (KN)	Max. Wheel Loading	356	366	376
电机总功率 (KW)	Span	479		
荐用钢轨	Crane Rail Recommended	QU120		
电源	Power Supply	380v / 50hz / 3ph AC		

技术参数 Technical Data


160/40T YZ Model Metallurgical Crane

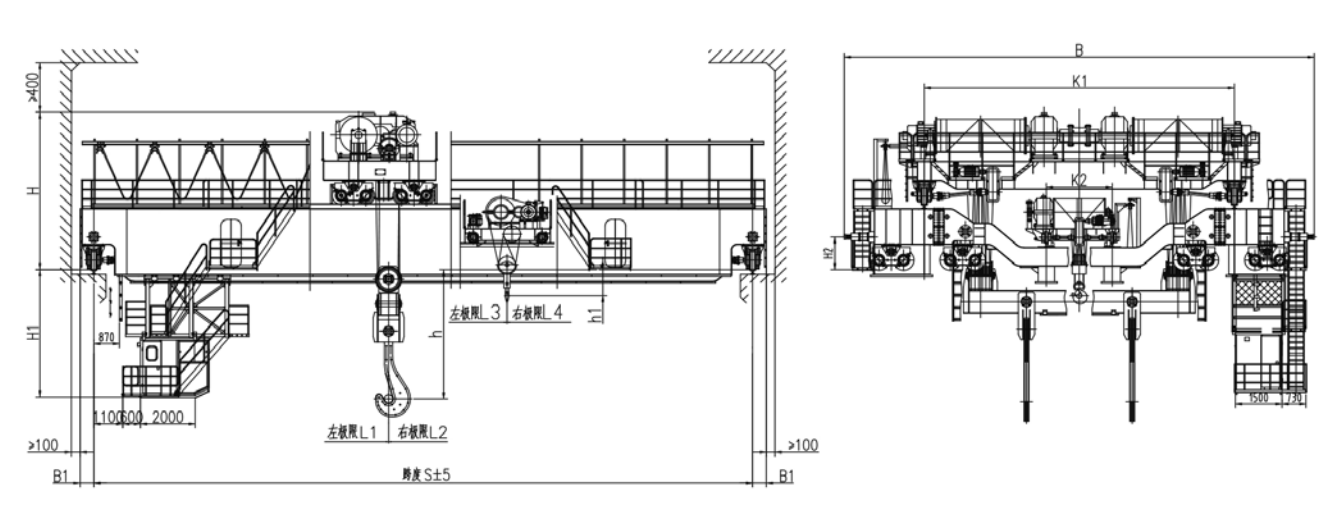

起重量-主钩 (t)	Cap-Main	160		
起重量-副钩 (t)	Cap-Aux.	40		
跨度 (m)	Span	22	25	28
起升高度-主钩 (m)	Lifting Height-Main	22		
起升高度-副钩 (m)	Lifting Height-Aux.	22		
工作制度	Duty	A7		
速度 Speed (m/min)				
起升-主起升	Main	0.6-8		
起升-副起升	Aux.	9.5		
主小车运行	Crab Travelling	37		
副小车运行	Crab Travelling	38		
大车运行	Trolley Travelling	77.8		
极限尺寸 Limt Dimenstion (mm)	L1	2400		
	L2	1800		
	L3	1700		
	L4	1700		
	h	4871		
	h1	1886		
主要尺寸 Main Dimensions (mm)	H	5695		
	H1	4710	4812	
	B	16932		
	K1	11300		
	K2	2400		
	B1	500		
最大轮压 (KN)	Max. Wheel Loading	400	410	376
荐用钢轨	Crane Rail Recommended	QU120		
电源	Power Supply	380v / 50hz / 3ph AC		

技术参数 Technical Data


180/50T-225/65T YZ Model Metallurgical Crane

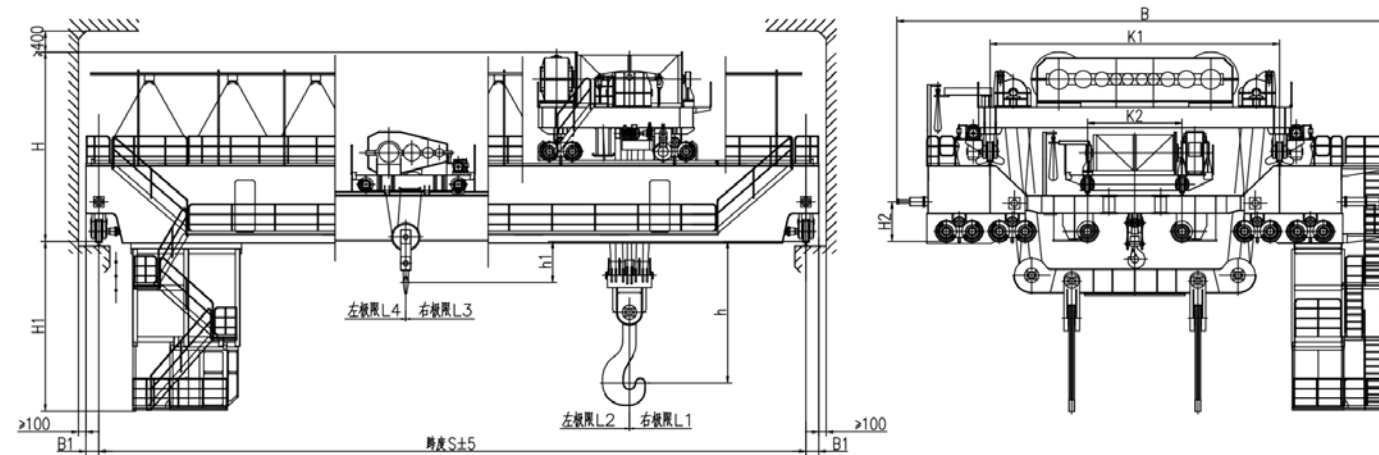

起重量-主钩 (t)	Cap-Main	180	200	225
起重量-副钩 (t)	Cap-Aux.	50	50	65
跨度 (m)	Span	28.5	28	27
起升高度-主钩 (m)	Lifting Height-Main	27	26	28
起升高度-副钩 (m)	Lifting Height-Aux.	29	26	28
工作制度	Duty	A7	A7	A7
速度 Speed (m/min)				
起升-主起升	Main	7.2	8	8
起升-副起升	Aux.	9.3	9.3	10
主小车运行	Crab Travelling	38	40	40
副小车运行	Crab Travelling	40	40	38
大车运行	Trolley Travelling	86	86	87
极限尺寸 Limt Dimension (mm)	L1	2600	2600	2600
	L2	2600	2600	3000
	L3	2350	2400	2400
	L4	1600	1600	1800
	h	6000	6200	6200
	h1	1200	1500	1500
主要尺寸 Main Dimensions (mm)	H	6500	7200	7200
	H1	5000	5500	5500
	B	16800	17800	17800
	K1	10600	10500	10500
	K2	3000	3000	3500
	B1	450	500	500
最大轮压 (KN)	Max. Wheel Loading	525	550	585
荐用钢轨	Crane Rail Recommended	QU120	QU120	QU120
电源	Power Supply	380v / 50hz / 3ph AC	380v / 50hz / 3ph AC	380v / 50hz / 3ph AC

技术参数 Technical Data

240/75T-320/80T YZ Model Metallurgical Crane

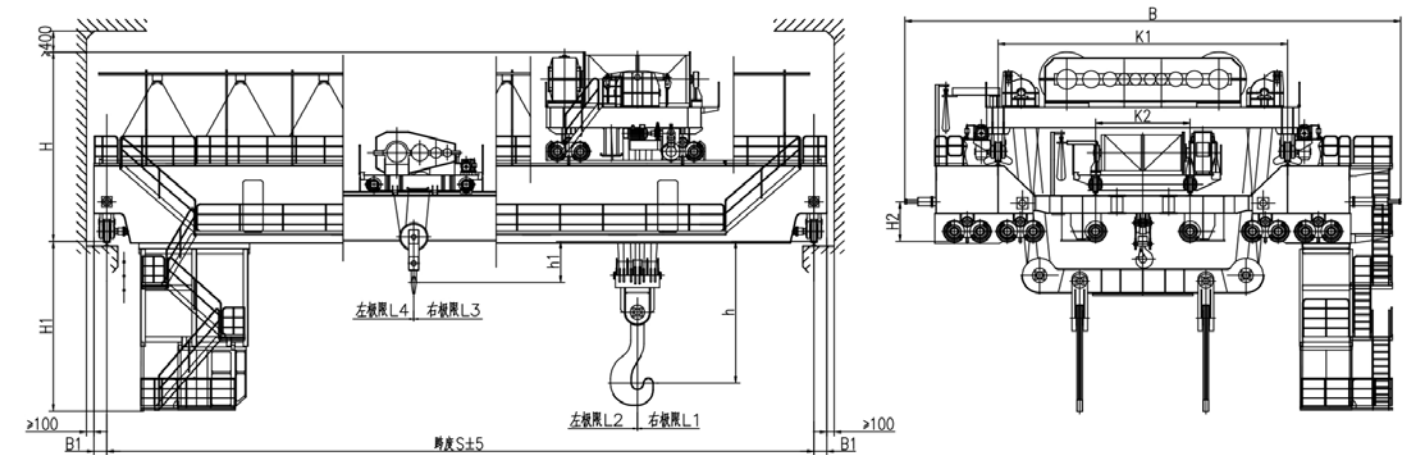

起重量-主钩 (t)	Cap-Main	240	280	320
起重量-副钩 (t)	Cap-Aux.	75	75	80
跨度 (m)	Span	24	21	24.5
起升高度-主钩 (m)	Lifting Height-Main	30	24	28
起升高度-副钩 (m)	Lifting Height-Aux.	30	26	32
工作制度	Duty	A7	A7	A7
速度 Speed (m/min)				
起升-主起升	Main	10	10	9
起升-副起升	Aux.	10.5	10.5	10
主小车运行	Crab Travelling	38	36	36
副小车运行	Crab Travelling	40	39	39
大车运行	Trolley Travelling	87	76	63
极限尺寸 Limt Dimension (mm)	L1	3200	3200	3300
	L2	3600	3600	3600
	L3	2500	2500	2500
	L4	2000	2000	2000
	h	6200	6200	6000
	h1	1800	1800	1800
主要尺寸 Main Dimensions (mm)	H	7500	7600	7800
	H1	5000	5000	5000
	B	17800	19200	19500
	K1	10500	12000	12500
	K2	3500	3800	5000
	B1	500	500	500
最大轮压 (KN)	Max. Wheel Loading	625	595	650
荐用钢轨	Crane Rail Recommended	QU120	QU120	QU120
电源	Power Supply	380v / 50hz / 3ph AC	380v / 50hz / 3ph AC	380v / 50hz / 3ph AC